

CATALOG

Softstarter

Type PSR, PSE and PSTX



Motors use almost one third of the world's generated electricity. So it is safe to say that reliable motor operation is crucial to our modern way of life.

Contents

04–13	ABB softstarter
14–23	PSR - The compact range
24–37	PSE - The efficient range
38–57	PSTX - The advanced range
58–65	Fieldbus communication
66–67	Marketing materials and tools

ABB softstarter

How we are helping the industry

A softstarter from ABB offers you several values and benefits. Whether you are a consultant, OEM, panel builder or end-user, a softstarter will add to your business value by securing motor reliability, improving installation efficiency and increasing application productivity.

SECURE MOTOR

Reliability



ABB softstarters help increase your motor's lifetime by protecting it from electrical stress. Starting currents are easily optimized to your load, application and motor size. Over ten motor protection features are included to keep your motor safe from different load and network irregularities.

IMPROVE INSTALLATION

Efficiency



Reduce your installation time and panel size by having all features you need built into your softstarter. Our softstarters are easy to install thanks to their compact design and many built-in features. The built-in bypass saves energy and space while reducing heat generation. A complete motor starting solution in one unit.

INCREASE APPLICATION

Productivity



Reduce the number of stops in your production by allowing your softstarter to do more than just starting. Our softstarters reduce the mechanical stress on your motor application, which will increase your uptime. Torque control, pump cleaning, motor brake and many other features enable you to operate your process at its full potential.




Xylem - South Africa

ABB's softstarters providing efficiency to the mining industry


One of Xylem's water solutions helps to prevent flooding in mines. Previous softstarters needed a lot of extra protection equipment. Xylem was looking for a simpler solution that would ensure reliability even at 3,500 meters depth. Reducing the number of components by 80 percent, shortened installation time by 60 percent. Costs cut to half has helped Xylem sell twice as many panels with softstarters as before.

Why softstarting matters to Xylem

Installation time reduced by



Total panel cost reduced by



For more examples of how ABB's softstarters are helping the industry, visit www.abb.com/lowvoltage/launches/pstx

ABB softstarter

How we are helping the industry

A softstarter can do wonders with your operations. Packed with useful features, it reduces the wear of your equipment, improve the reliability of your processes and increase overall productivity.

Controlling pumps

ELIMINATING WATER HAMMERING WITH TORQUE CONTROL

Water hammering is a common problem with pumps. It typically results in a lot on wear of pipes and valves when stopping the pump. The ABB softstarter feature torque control stop eliminates water hammering and prolongs the lifetime of the system, while reducing pump downtime.

KEEP PIPES AND PUMPS CLEAN

Many pumps risk getting clogged over time. This will cause reduced flow and increased risk of pump damage. Thanks to the feature to reverse the direction of the flow and start again with kick-start, ABB softstarters can help prevent and solve pump clogging and associated downtime.

AVOID RUNNING DRY WITH UNDERLOAD PROTECTION

Damages due to pumps running dry can be avoided with the softstarter feature underload protection. It stops the motor which saves the pump from additional wear and contributes to prolonging its lifetime.



Controlling fans

SOFT STARTING ADJUSTED TO APPLICATION


Fans normally have a high moment of inertia, which makes starting tough and current high. Using an ABB softstarter, the voltage is increased gradually during start, which reduces the current and removes the inrush peak. It is possible to adjust the settings to fit almost any starting condition, from unloaded to fully loaded.

FAST STOPS WITH MOTOR BRAKING

It can also take a long time to stop the fan. Active braking using the dynamic brake feature reduces stopping times. This improves process safety when the load has a high moment of inertia and makes fan operation easier for the operator.

AVOID UNWANTED MOVEMENTS WITH STAND STILL BRAKE

An idle fan that is rotating backwards, due to wind or airflow from another fan, can be kept still using the stand still brake. It prevents unwanted airflow and improves the control of the system without the need for an external mechanical brake.

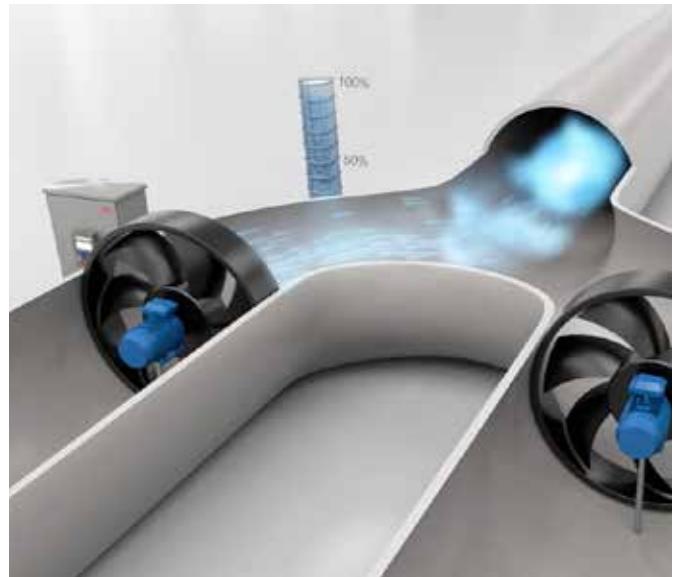

Controlling conveyor belts

AVOID OVERHEATING WITH OVERLOAD PROTECTION

Too much material on a conveyor belt may cause overload and overheating, reducing the reliability and longevity of the motor. ABB's overload protection feature shuts down the motor in case of overload, avoiding overheating.

INCREASED FLEXIBILITY WITH JOG WITH SLOW SPEED

After stopping the belt, it may be necessary to run the motor at low speed to correctly position the belt before resuming operation. The jog with slow speed feature makes it possible to position the belt manually, in both forward and reverse direction, before re-starting the belt. This improves process efficiency and eliminates the need for a variable speed drive, a considerably more expensive solution for solving the problem.

CONTINUOUS OPERATION WITH LIMP MODE

Shorted thyristor is a possible problem for a softstarter, putting it out of operation until the component has been replaced. Using limp mode, the softstarter will continue to work with one thyristor shorted, avoiding costly unplanned stoppages.



Controlling compressors

FULL CONTROL OF CURRENT WITH CURRENT LIMIT

Many applications are sensitive to high or variable starting currents. The feature current limit makes it possible to start the motor securely even in a weaker network, improving the availability of the equipment and system. Reducing the current means reducing the stress on cables, network and motor.

FULL VOLTAGE START FOR SCROLL COMPRESSORS

For scroll compressors it is often necessary to start the motor in a very short time while still maintaining a low starting current. Full voltage start is a start mode that gives you almost a direct start but without the current peak.

PHASE REVERSAL PROTECTION FOR PROBLEM-FREE COMMISSIONING

A motor rotating in the wrong direction, which may occur due to connecting the phases wrongly, may cause severe damage to a compressor. Using phase reversal protection, the motor won't start in the wrong direction, avoiding costly compressor downtime and repairs.



ABB softstarters

Why motor starting and stopping matters

There are some common issues associated with starting and stopping electrical motors. Depending on requirement, different starting and stopping methods can be used.



DIRECT-ON-LINE

Direct-on-line starting (DOL) is the easiest and most commonly used starting method. It is suitable for stable networks and mechanically stiff and well-dimensioned shaft systems due to the high current and torque generated during start.

DOL starting is uncontrolled, which means that the motor will start with maximum current and torque regardless of load type.



STAR-DELTA

A star-delta starter reduces current and torque during start. The starting current is about one third compared to direct-on-line starting, although it also reduces the starting torque to about 25 percent.

Star-delta is not adjustable, so if the torque is reduced too much, the motor will not start. Current peaks will happen when switching from star to delta connection.




SOFTSTARTER


Like direct-on-line and star delta starters, softstarters are used to start and stop motors in full-speed applications. It eliminates common problems associated with motor starting and stopping, including electrical surges, spikes and high inrush currents.

Because it offers soft starting and stopping, a softstarter is the optimal compromise between a direct-on-line or star-delta starter and a variable speed drive in many full-speed motor applications.

Torque



Motor current

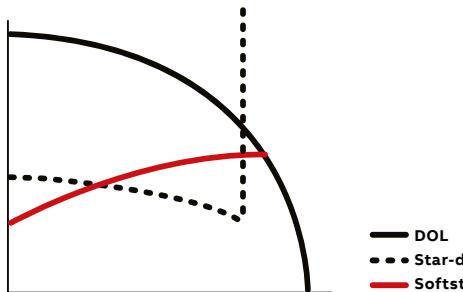

Typical torque and current curves from starting a motor using DOL, star-delta and softstarter.

VARIABLE SPEED DRIVE

Like a softstarter, a variable speed drive (VSD) can perform soft motor starting and stopping. However, the VSD was designed primarily to control motor speed, resulting in energy efficient motor operation in variable speed applications. Using a VSD with the sole purpose of ensuring soft starting and stopping of full-speed motors can therefore be considered an unnecessarily advanced solution.

ABB softstarters

A solution for every need

ABB's softstarter offering consists of three ranges, covering every need. The products help you secure motor reliability, improve installation efficiency and increase application productivity.



PSR – The compact range		PSE – The efficient range		PSTX – The advanced range	
Technical data:					
Rated motor current	3...105 A	Rated motor current	30...370 A	Rated motor current	30...1250 A (inside delta: 2160 A)
Main motor voltage	208...600 V	Main motor voltage	208...600 V	Main motor voltage	208...690 V
Control supply voltage	100...240 V AC or 24 V AC/DC	Control supply voltage	100...250 V AC	Control supply voltage	100...250 V AC

SOFTSTARTER FEATURE SELECTION GUIDE

		Features																																		
		Current limit	Current limit ramp and dual current limit	Dual overload protection	Underload protection	Power factor underload protection	Locked rotor protection	Phase reversal protection	Current/Voltage imbalance protection	Customer defined protection	Motor heating	PTC/PT100 protection	Overvoltage/undervoltage protection	Built-in bypass	Earth-fault protection	Inside-delta protection	Graphical display and keypad	Detachable keypad	Motor runtime and start count	Programmable warning functions	Overload time-to-trip	Analog output	Fieldbus communication	Event log	Multiple languages	Electricity metering	Toque control	Torque limit	Limp mode	Jog with slow speed forward/ reverse	Dynamic brake	Stand still brake	Sequence start	Full voltage start	Kick start	Automatic pump cleaning
PSR	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—					
PSE	•	—	•	—	•	—	—	—	—	—	—	—	—	—	—	—	•	○	—	—	—	—	—	—	—	—	—	—	—	—	—					
PSTX	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	17	•	•	•	•	•	•	•	•	•	•	•					
Secure motor reliability										Improve installation efficiency										Increase application productivity																

• Standard ○ Optional — Not available

ABB softstarters

A part of your motor starting solution

Motor starting requires several components to work perfectly together. ABB is a one-stop shop for motor starting, offering all the necessary components and complete motor starting solutions, proven together in numerous installations worldwide.



Can I use a Softstarter for an ATEX motor?

ABB's softstarters PSR, PSE and PSTX can be used to start ATEX classified motors in Ex environments if the following considerations are taken into account:


- The softstarter has to be placed outside the Ex area. Either in another location or inside an ATEX approved panel.
- A separate ATEX approved overload relay from ABB has to be used together with a line contactor. This overload relay will replace the built-in EOL in the softstarter and has an ATEX approved tripping curve.
- Select softstarter according to normal or heavy-duty start depending on application and line contactor and overload relay with type 2 coordination.



Can I use a softstarter on a ship?

ABB's softstarters PSE and PSTX have marine approvals and are certified for marine environment.

Ships uses IT-networks which means that there is a floating electrical ground. It is possible to use an ABB softstarter in such a network but it is recommended to not connect the functional ground on the softstarter to the ship to avoid disturbances from the network to effect the electronics inside the softstarter.

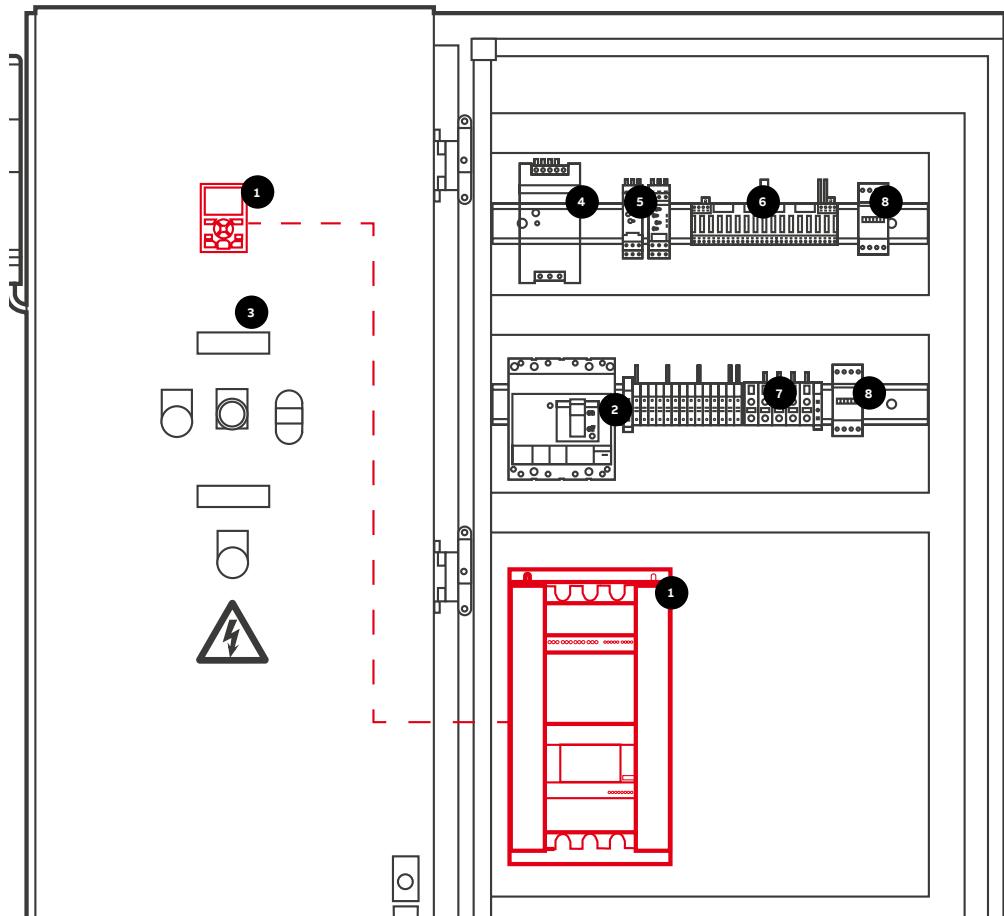

- 1 SOFTSTARTER**
- Soft start and stop with reduced current
 - Features to improve process productivity
 - Detachable keypad for front door mounting on a panel



- 2 SHORT CIRCUIT BREAKER MCCB**
- Short circuit protection of motor
 - Possibility for electrical isolation



- 3 PILOT DEVICES**
- Remote control of motor
 - Indication of softstarter and motor status with light and sound
 - Emergency stop of motor



- 4 POWER SUPPLY CP-E**
- Possible to use 24V AC/DC equipments in the panel, e.g. PLC



- 5 LIQUID LEVEL MONITORING RELAYS CM-ENS**
- Monitoring and signalling the water level



- 6 PLC 800M**
- Automatic control
 - Remote communication



- 7 TERMINAL BLOCKS SNK RANGE**
- Easy installation of control wires



- 8 LINE CONTACTOR AF**
- Isolation at stop
 - Isolation at faults
 - Emergency stop
 - Back-up DOL starter

ABB softstarters


Wall mounting instructions

Minimum distance to wall mm (in)


Softstarter, type	A ¹⁾	B ¹⁾	C	D
PSR				
PSR3 ... PSR16	0	0	25 (0.98)	N/A
PSR25 ... PSR30	0	0	25 (0.98)	N/A
PSR37 ... PSR45	0	0	25 (0.98)	N/A
PSR60 ... PSR105	0	0	25 (0.98)	N/A
PSE				
PSE18 ... PSE105	100 (3.94)	10 (0.39)	20 (0.79)	N/A
PSE142 ... PSE170	100 (3.94)	10 (0.39)	20 (0.79)	N/A
PSE210 ... PSE370	100 (3.94)	10 (0.39)	20 (0.79)	N/A
PSTX				
PSTX30 ... PSTX105	100 (3.94)	10 (0.39)	20 (0.79)	35 (1.38)
PSTX142 ... PSTX170	100 (3.94)	10 (0.39)	20 (0.79)	35 (1.38)
PSTX210 ... PSTX370	100 (3.94)	10 (0.39)	20 (0.79)	35 (1.38)
PSTX470 ... PSTX570	150 (5.91)	15 (0.59)	20 (0.79)	35 (1.38)
PSTX720 ... PSTX840	150 (5.91)	15 (0.59)	20 (0.79)	35 (1.38)
PSTX1050 ... PSTX1250	150 (5.91)	15 (0.59)	20 (0.79)	35 (1.38)

¹⁾PSR, Only for wall mounted Softstarters


Minimum distance to front



Minimum distance to wall

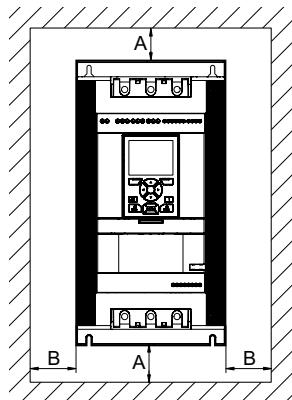

Maximum mounting angle

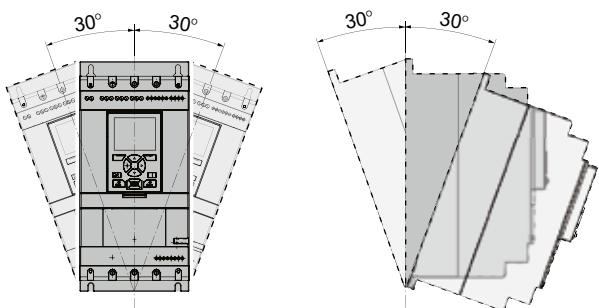

Items included in the box with the softstarter

Multi-language manual	Terminal kit	Cable and mounting kit for detachable keypad
PSR3 ... PSR105	•	—
PSE18 ... PSE370	•	—
PSTX30 ... PSTX1250	•	•

ABB softstarters

Certifications and approvals

The table below shows the certifications and approvals for ABB's softstarters. For other certifications and/or approvals, please contact ABB.

Certifications and approvals

Abbreviation approved in	Certifications						Approvals: ship classification societies					
	CE EU	cULus Canada USA	CCC	EAC Russia	ANCE Mexico	C-tick Australia	ABS	DNV GL	Lloyd's Register	CCS	PRS	Class NK
PSR3 ... PSR105	•	•	•	•	•	•	—	—	—	—	•	—
PSE18 ... PSE370	•	•	•	•	•	•	•	•	•	•	•	•
PSTX30 ... PSTX1250	•	•	•	•	•	•	•	•	•	•	•	•

Note: • Standard design approved, the products bear the certification mark when it is required.

Directives and standards

No. 2006/95/EC	Low voltage equipment
No. 2004/108/EC	Electromagnetic compatibility
EN 60947-1	Low-voltage switchgear and controlgear - Part 1: General rules
EN 60947-4-2	AC semiconductor motor controllers and starters
UL 508	Industrial Control Equipment
CSA C22.2 No 14	Industrial Control Equipment



The PSR softstarter is the most compact of all the softstarter ranges which allows for design of a compact starting equipment. The PSR combined with a manual motor starter makes up a far more compact starting solution than the complex star-delta starter, and with the built-in bypass, the energy losses inside the softstarter are highly reduced.

PSR - The compact range

16–17	PSR - The compact range
18	Overview
19	Ordering details
20	Accessories
21	Technical data
22	Dimensions
23	Circuit diagrams

PSR - The compact range

Introduction



- Two-phase controlled
- Operational voltage: 208...600 V AC
- Wide rated control supply voltage: 100...240 V AC, 50/60 Hz or 24 V AC/DC
- Rated operational current: 3...105 A
- Soft start with voltage ramp
- Soft stop with voltage ramp
- Built-in bypass for energy saving and easy installation
- Easy set-up by three potentiometers
- Fieldbus communication with FieldBusPlugadapter and the FieldBusPlug
- Run and Top of Ramp relays available for monitoring
- Connection kits available for connection to ABB's manual motor starters (MMS)

SECURE MOTOR

Reliability



REDUCE THE ELECTRICAL STRESSES AND KEEP THE MOTOR PROTECTED WITH THE MMS

The PSR reduces the starting current for the motor. The possibility to connect it to the manual motor starter makes it possible to build a compact and complete starting solution with overload and short-circuit protection.

IMPROVE INSTALLATION

Efficiency



SAVING TIME AND MONEY WITH BUILT-IN BYPASS AND EASY SET-UP

On the PSR, the bypass is built in and verified by ABB, saving you time during installation and space in your panel. Set-up is done through three potentiometers making it very fast and easy.


INCREASE APPLICATION

Productivity





REDUCE THE MECHANICAL STRESSES ON YOUR MOTOR

Soft start and stop with PSR will reduce mechanical wear and tear on the application and increase the availability and uptime.

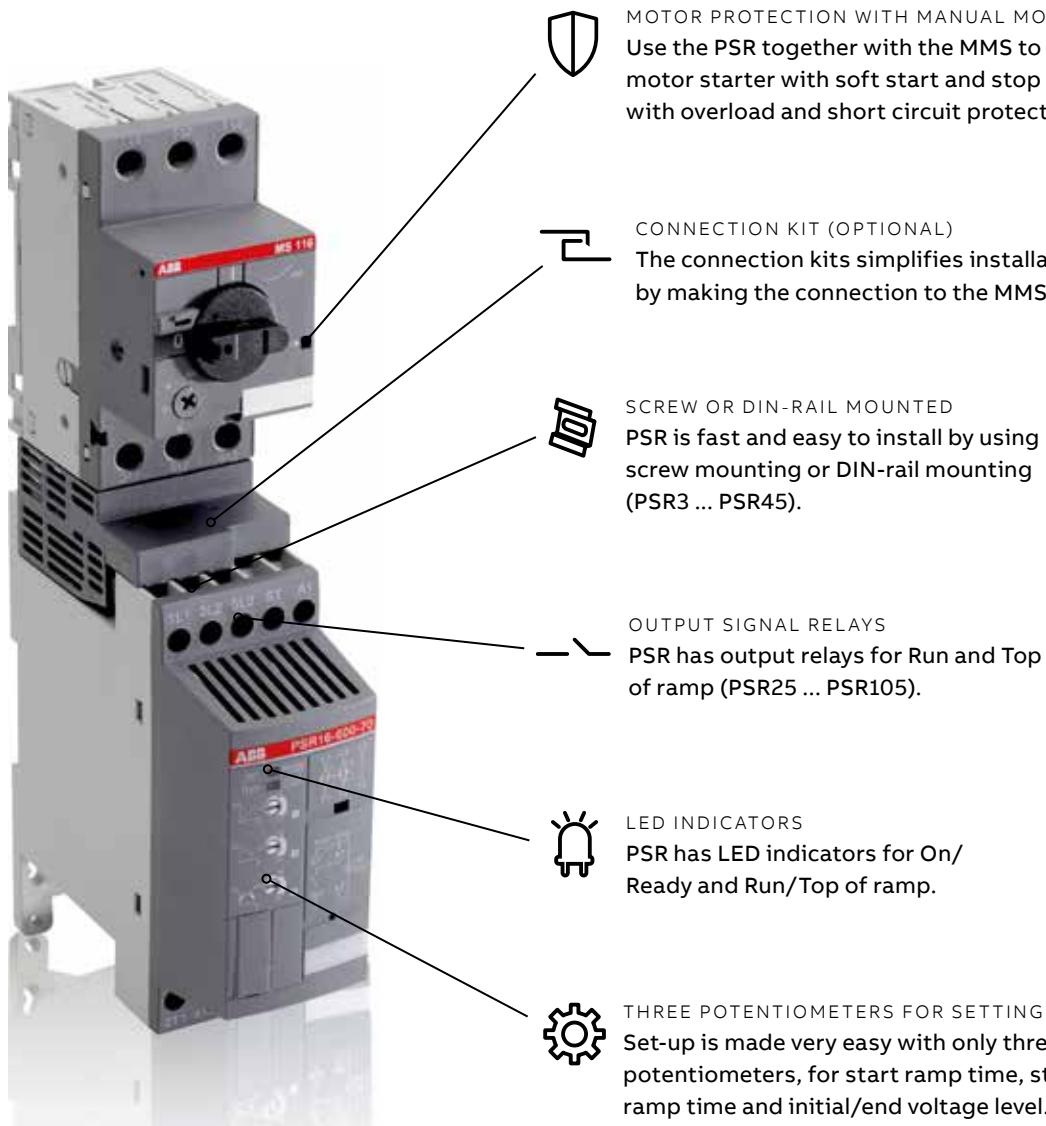
**SETTINGS**

- 1 Start = 1...20 sec
- 2 Stop = 0...20 sec - including the step down voltage
- 3 Step down = 2% reduction for each second increased stop ramp
 $U_{ini} = 40\ldots70\%$ results in end voltage = 30...60%

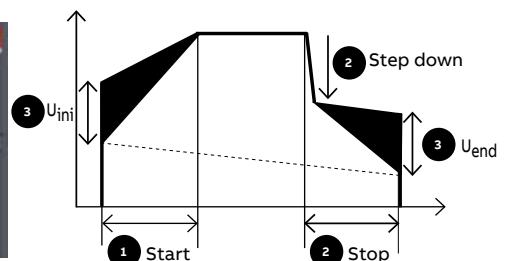

PSR - The compact range

Overview

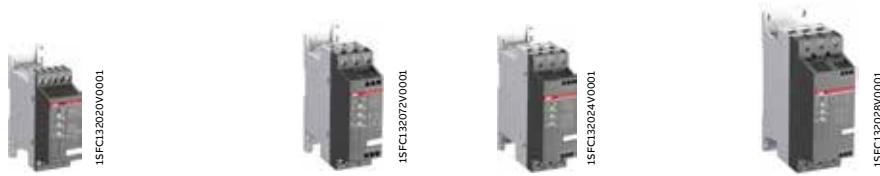

	PSR3 ... PSR16				PSR25 ... PSR30				PSR37 ... PSR45				PSR60 ... PSR105			
Normal start In-line connected (400 V) kW	PSR3	PSR6	PSR9	PSR12	PSR16	PSR25	PSR30	PSR37	PSR45	PSR60	PSR72	PSR85	PSR105			
IEC, max. A	1.5	3	4	5.5	7.5	11	15	18.5	22	30	37	45	55			
(440-480 V) hp	3.9	6.8	9	12	16	25	30	37	45	60	72	85	105			
UL, max. FLA	2	3	5	7.5	10	15	20	25	30	40	50	60	75			
	3.4	6.1	9	11	15.2	24.2	28	34	46.2	59.4	68	80	104			
400 V, 40 °C																
Using manual motor starters type 1 coordination will be achieved ¹⁾	Manual motor starter (50 kA)				MS116				MS132				MS450			
													MS495			
Using gG fuses type 1 coordination will be achieved ¹⁾	Fuse protection (50 kA) gG Fuse				10 A	16 A	25 A	32 A	50 A	63 A	100 A	125 A	200 A	250 A		
Suitable switch fuse for the above gG fuses ¹⁾	Switch fuse				OS32G				OS125G				OS250			
J-type fuses for UL coordination ¹⁾	Max. fuse, J-type				35 A				60 A				90 A			
													110 A			
									125 A				150 A			
									200 A							
Overload protection is used to protect the motor from over heating ¹⁾	Thermal overload relay				TF42DU				TA75DU				TA110DU			
The line contactor is not required for the softstarter itself but often used to open if OL trips ¹⁾	Line contactor				AF9	AF12	AF16	AF26	AF30	AF38	AF52	AF65	AF80	AF96	AF116	

¹⁾ This is an example of coordination. For more examples see: applications.it.abb.com/SOC

PSR - The compact range

Ordering details



Typical applications

- Bow thruster
- Centrifugal pump
- Compressor
- Conveyor belt (short)
- Elevator



For a more precise selection, use the online softstarter selection tool available by scanning the shown QR code or using the selection tool available on: new.abb.com/low-voltage/products/softstarters



PSR3 ... PSR16



PSR25 ... PSR30



PSR37 ... PSR45



PSR60 ... PSR105

Rated operational voltage U_e , 208...600 V AC

Rated control supply voltage, U_s , 100...240 V AC, 50/60 Hz

IEC										Type	Order code	Weight	
Rated operational power										current	power	pkg (1 pce)	
230 V 400 V 500 V										200/208 V 220/240 V 440/480 V 550/600 V			
P _e	P _e	P _e	I _e	P _e	FLA								
kW	kW	kW	A	hp	hp	hp	hp	hp	A			kg	(lb)
0.75	1.5	2.2	3.9	0.5	0.75	2	2	3.4	PSR3-600-70	1SFA896103R7000	0.45	(0.99)	
1.5	3	4	6.8	1	1.5	3	5	6.1	PSR6-600-70	1SFA896104R7000	0.45	(0.99)	
2.2	4	4	9	2	2	5	7.5	9	PSR9-600-70	1SFA896105R7000	0.45	(0.99)	
3	5.5	5.5	12	3	3	7.5	10	11	PSR12-600-70	1SFA896106R7000	0.45	(0.99)	
4	7.5	7.5	16	3	5	10	10	15.2	PSR16-600-70	1SFA896107R7000	0.45	(0.99)	
5.5	11	15	25	7.5	7.5	15	20	24.2	PSR25-600-70	1SFA896108R7000	0.65	(1.43)	
7.5	15	18.5	30	7.5	10	20	25	28	PSR30-600-70	1SFA896109R7000	0.65	(1.43)	
7.5	18.5	22	37	10	10	25	30	34	PSR37-600-70	1SFA896110R7000	1.00	(2.20)	
11	22	30	45	15	15	30	40	46.2	PSR45-600-70	1SFA896111R7000	1.00	(2.20)	
15	30	37	60	20	20	40	50	59.4	PSR60-600-70	1SFA896112R7000	2.20	(4.85)	
22	37	45	72	20	25	50	60	68	PSR72-600-70	1SFA896113R7000	2.27	(5.00)	
22	45	55	85	25	30	60	75	80	PSR85-600-70	1SFA896114R7000	2.27	(5.00)	
30	55	55	105	30	40	75	100	104	PSR105-600-70	1SFA896115R7000	2.27	(5.00)	

Rated operational voltage U_e , 208...600 V AC

Rated control supply voltage, U_s , 24 V AC/DC, 50/60 Hz

0.75	1.5	2.2	3.9	0.5	0.75	2	2	3.4	PSR3-600-11	1SFA896103R1100	0.45	(0.99)
1.5	3	4	6.8	1	1.5	3	5	6.1	PSR6-600-11	1SFA896104R1100	0.45	(0.99)
2.2	4	4	9	2	2	5	7.5	9	PSR9-600-11	1SFA896105R1100	0.45	(0.99)
3	5.5	5.5	12	3	3	7.5	10	11	PSR12-600-11	1SFA896106R1100	0.45	(0.99)
4	7.5	7.5	16	3	5	10	10	15.2	PSR16-600-11	1SFA896107R1100	0.45	(0.99)
5.5	11	15	25	7.5	7.5	15	20	24.2	PSR25-600-11	1SFA896108R1100	0.65	(1.43)
7.5	15	18.5	30	7.5	10	20	25	28	PSR30-600-11	1SFA896109R1100	0.65	(1.43)
7.5	18.5	22	37	10	10	25	30	34	PSR37-600-11	1SFA896110R1100	1.00	(2.20)
11	22	30	45	15	15	30	40	46.2	PSR45-600-11	1SFA896111R1100	1.00	(2.20)
15	30	37	60	20	20	40	50	59.4	PSR60-600-11	1SFA896112R1100	2.20	(4.85)
22	37	45	72	20	25	50	60	68	PSR72-600-11	1SFA896113R1100	2.27	(5.00)
22	45	55	85	25	30	60	75	80	PSR85-600-11	1SFA896114R1100	2.27	(5.00)
30	55	55	105	30	40	75	100	104	PSR105-600-11	1SFA896115R1100	2.27	(5.00)

PSR - The compact range

Accessories

	For softstarter type	Type	Order code	Pkg qty	Weight (1 pce) kg	Weight (1 pce) (lb)
PSR16-MS116	Connection kit					
	PSR3...16	PSR16-MS116	1SFA896211R1001	1	0.022	(0.049)
	PSR25...30	PSR30-MS132	1SFA896212R1001	1	0.040	(0.088)
PSR30-MS132	PSR60...105	PSR105-MS495	1SAM501903R1001	1	0.034	(0.075)
	PSR37...45	PSR45-MS165	1SFA896216R1001	1	0.050	(0.110)
PSR45-MS165	PSR60...72	PSR60-MS165	1SFA896215R1001	1	0.050	(0.110)
PSR60-MS165						
PSR105-MS495						
	For softstarter type	Type	Order code	Pkg qty	Weight (1 pce) kg	Weight (1 pce) (lb)
	Fan					
PSR-FAN3-45A	PSR3 ... PSR45	PSR-FAN3-45A	1SFA896311R1001	1	0.010	(0.022)
	PSR60 ... PSR105	PSR-FAN60-105A	1SFA896313R1001	1	0.013	(0.029)
PSR-FAN60-105A						
	For softstarter type	Type	Order code	Pkg qty	Weight (1 pce) kg	Weight (1 pce) (lb)
	Terminal enlargements					
PSLW	PSR60 ... PSR105 Wire range mm ² 1 x 10...50 mm ² , 2 x 10...25 mm ²	PSLW-72	1SFA899002R1072	1	0.150	(0.033)
PSLW						
	For softstarter type	Type	Order code	Pkg qty	Weight (1 pce) kg	Weight (1 pce) (lb)
	FieldBusPlug connection accessory					
PS-FBPA	PSR3 ... PSR105	PS-FBPA	1SFA896312R1002	1	0.060	(0.132)
PS-FBPA						

PSR - The compact range

Technical data

Softstarter types	PSR3	PSR6	PSR9	PSR12	PSR16	PSR25	PSR30	PSR37	PSR45	PSR60	PSR72	PSR85	PSR105
Rated insulation voltage U_i	600 V												
Rated operational voltage U_e	208...600 V +10%/-15%, 50/60 Hz ±5%												
Rated control supply voltage U_s	100...240 V AC, 50/60Hz ±5% or 24 V AC/DC, +10%/-15%,												
Starting capacity at I_e	4 x I_e for 6 sec.												
Number of starts per hour	See table below for details												
standard	10 ¹⁾												
with aux. fan	20 ¹⁾												
Ambient temperature													
during operation	-25...+60 °C (-13...+140 F) ²⁾												
during storage	-40...+70 °C (-40...+158 F)												
Maximum altitude	4000 m (13123 ft) ³⁾												
Degree of protection													
main circuit	IP20												IP10
control circuit	IP20												
Power consumption: Supply circuit													
at 100...240 V AC	12 VA												10 VA
at 24 V AC/DC	5 W												
Max. Power loss at rated I_e	0.7 W	2.9 W	6.5 W	11.5 W	20.5 W	25 W	36 W	5.5 W	8.1 W	3.6 W	5.2 W	7.2 W	6.6 W
Connectable cable area													
main circuit	1 x 0.75...2.5 mm ² (19...14 AWG)							1 x 2.5...10 mm ² (14...8 AWG)	1 x 6...35 mm ² (10...2 AWG)	1 x 10...95 mm ² (8...4/0 AWG)			
	2 x 0.75...2.5 mm ² (19...14 AWG)							2 x 2.5...10 mm ² (14...8 AWG)	2 x 6...16 mm ² (10...6 AWG)	2 x 6...35 mm ² (10...2 AWG)			
control circuit	1 x 0.75...2.5 mm ² (19...14 AWG)							1 x 0.75...2.5 mm ² (19...14 AWG)					
	2 x 0.75...2.5 mm ² (19...14 AWG)							2 x 0.75...1.5 mm ² (19...16 AWG)					
Signal relays													
for run signal													
resistive load	3 A							3 A					
AC-15 (contactor)	0.5 A							0.5 A					
for top of ramp signal													
resistive load	-							3 A					
AC-15 (contactor)	-							0.5 A					
LED													
for On/Ready	Green												
for Run/Top of ramp	Green												
Settings													
Ramp time during start	1...20 sec.												
Ramp time during stop	0...20 sec.												
Initial- and end voltage	40...70%												

¹⁾ Valid for 50% on time and 50% off time. If other data is required, contact your local ABB office.

²⁾ Above 40 °C (104 F) up to max. 60 °C (140 F) reduce the rated current with 0.8% per °C (0.44% per F).

³⁾ When used at high altitudes, above 1000 meters (3281 ft) up to 4000 meters (13123 ft), de-rate the rated current using the following formula.

$$[\% \text{ of } I_e] = 100 - \frac{x-1000}{150} \quad x = \text{actual altitude of the softstarter in meter.}$$

Number of starts per hour using PSR softstarters

Motor current	Starts/hour without auxiliary fan								Starts/hour with auxiliary fan								
	10	20	30	40	50	60	80	100	10	20	30	40	50	60	80	100	
3 A	PSR3								PSR3								
6 A	PSR6				PSR9				PSR6								
9 A	PSR9		PSR12			PSR16		PSR25		PSR9							
12 A	PSR12		PSR16		PSR25		PSR30		PSR12								
16 A	PSR16	PSR25		PSR30		PSR37		PSR45		PSR16							
25 A	PSR25	PSR30	PSR37		PSR45		PSR60		PSR25	PSR30	PSR37		PSR45				
30 A	PSR30	PSR37		PSR45		PSR60		PSR72	PSR30	PSR37	PSR45						
37 A	PSR37	PSR45		PSR60		PSR72	PSR85	PSR105	PSR37	PSR45		PSR60					
45 A	PSR45		PSR60		PSR72	PSR85	PSR105	-	PSR37	PSR45		PSR60		PSR72			
60 A	PSR60		PSR72	PSR85	PSR105		-	-	PSR60	PSR72		PSR85	PSR105	-	-	-	
72 A	PSR72	PSR85	PSR105		-	-	-	-	PSR72	PSR85		PSR105	-	-	-	-	
85 A	PSR85	PSR105		-	-	-	-	-	PSR85	PSR105		-	-	-	-	-	
105 A	PSR105	-	-	-	-	-	-	-	PSR105	-	-	-	-	-	-	-	


Data based on an ambient temperature of 40° (104 F), starting current of 4 x I_e , and ramp time 6 seconds.
For more optimized selection or to use PSR for heavy-duty starts, please use the softstarter selection tool.

PSR - The compact range


Dimensions

Main dimensions mm, inches


PSR3 ... PSR16

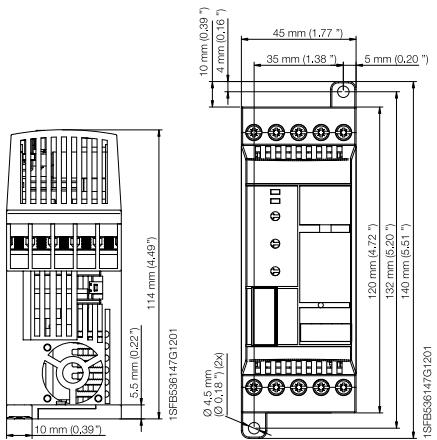


PSR25 ... PSR30

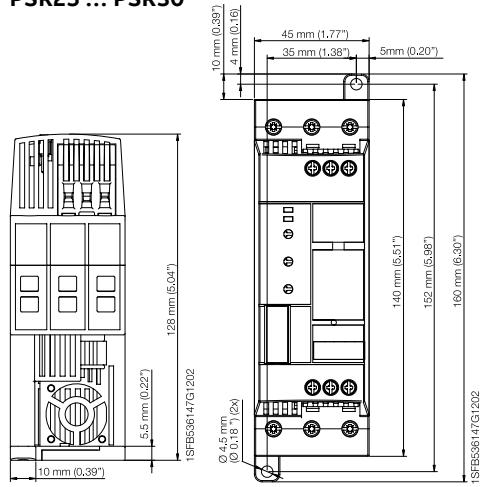

PSR37 ... PSR45

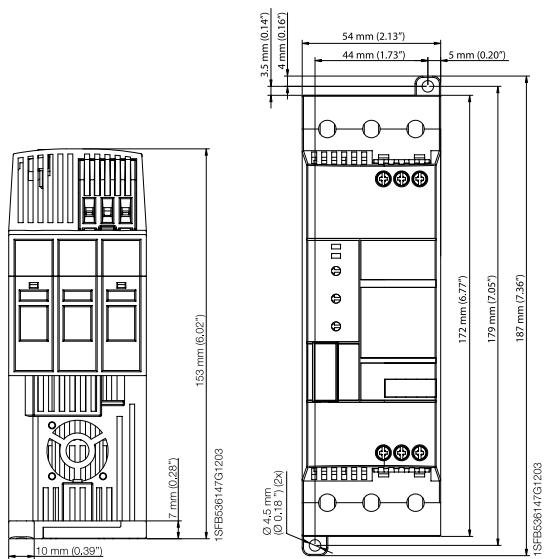

PSR60 ... PSR105

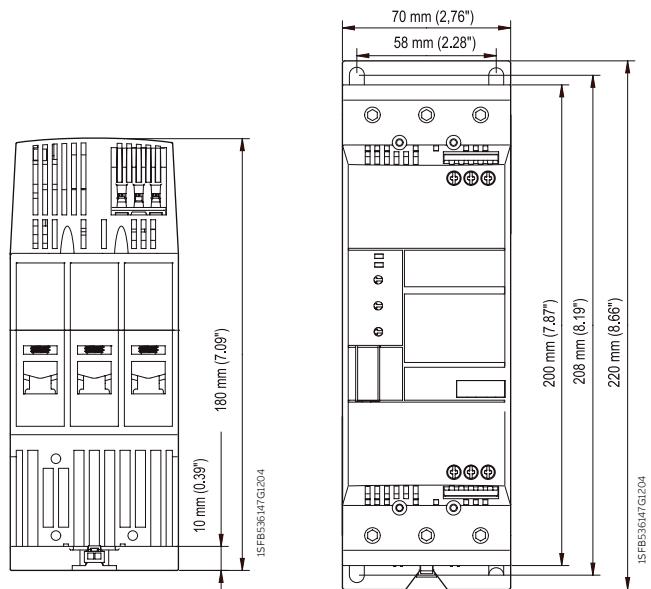


PSR - The compact range


Circuit diagrams

Main dimensions mm, inches


PSR3 ... PSR16 With MMS

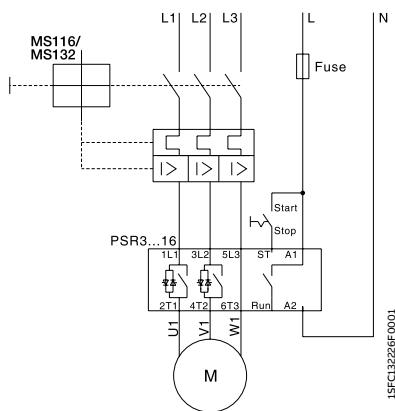


With MMS and auxiliary contact

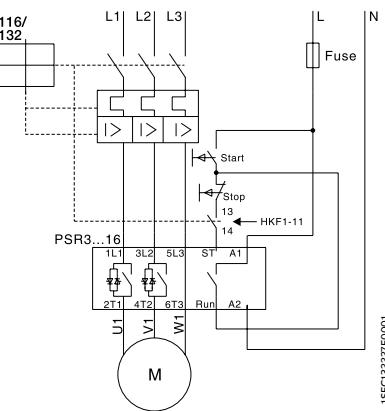


With fuses, contactor and O.L.

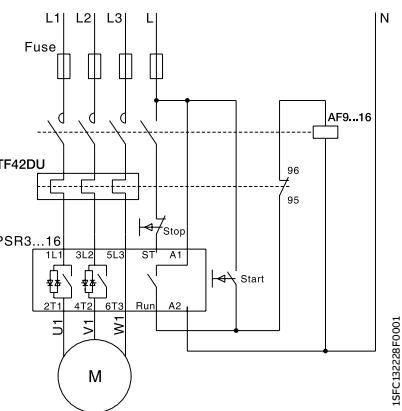


PSR25 ... PSR45 With MMS

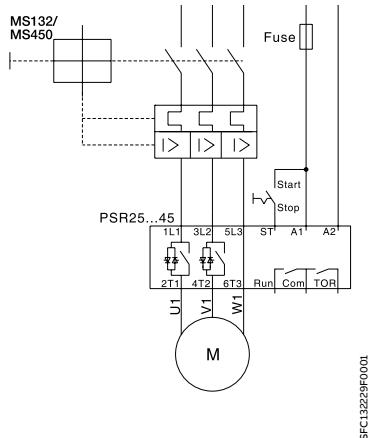


With MMS and auxiliary contact

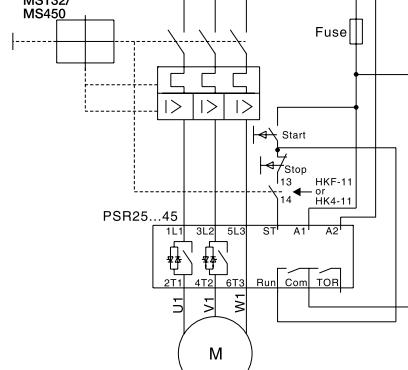


With fuses, contactor and O.L.

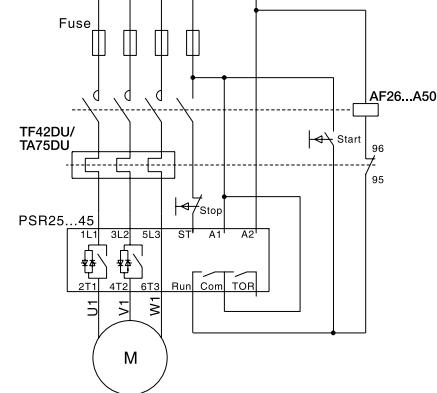


PSR60 ... PSR105 With MMS

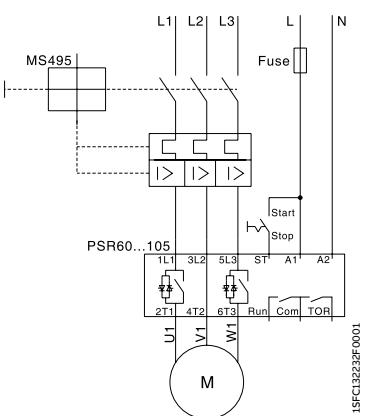

With MMS and auxiliary contact

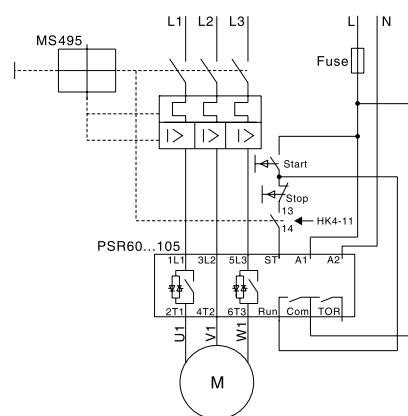

With fuses, contactor and O.L.

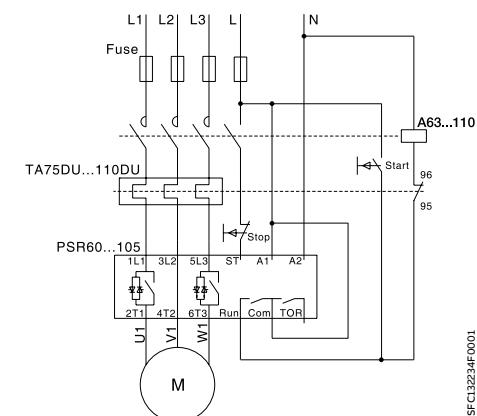



The PSE has been designed to meet the most common requirements from the water segment and is specialized on pump operation. It combines the requested protections with a very compact design and built-in bypass. Remote operation with external keypad or over fieldbus is available as an option.

PSE - The efficient range

26–27	Introduction
28–29	Overview
30–31	ordering details
32	Accessories
33–35	Technical data
36	Dimensions
37	Circuit diagrams

PSE - The efficient range

Introduction



- Two-phase controlled
- Operational voltage: 208...600 V AC
- Wide rated control supply voltage: 100...250 V AC, 50/60 Hz
- Rated operational current: 18...370 A
- Voltage ramp and torque control for both start and stop
- Current limit
- Kick-start
- Built-in bypass for energy saving and easy installation
- Coated PCBA protecting from dust, moist and corrosive atmosphere
- Illuminated display that uses symbols to become language neutral
- External keypad rated IP66 (Type 1, 4X,12) as an option
- Fieldbus communication with FieldBusPlug adapter and the FieldBusPlug
- Analog output for display of motor current
- Electronic overload protection
- Underload protection
- Locked rotor protection

SECURE MOTOR Reliability



BASIC MOTOR PROTECTION AND CURRENT LIMIT

The PSE includes the most important protections for handling different load situations that can happen to pumps e.g. overload and underload. The current limit gives you more control of the motor during start and allows you to start your motor in weaker networks.

IMPROVE INSTALLATION Efficiency



SAVING TIME AND MONEY WITH BUILT-IN BYPASS AND COMPACT DESIGN

On the PSE, the bypass is built in and verified by ABB, saving you time during installation and space in your panel. The keypad is language neutral and illuminated for easy set-up and operation in field. The compact design makes installation fast and easy.

INCREASE APPLICATION Productivity



TORQUE CONTROL FOR ELIMINATION OF WATER HAMMERING IN PUMPS

Torque control is the most efficient way to stop a full speed pump. The PSE has a special torque stop ramp that is designed together with a pump manufacturer to eliminate water hammering in an optimal way.



SCREW MOUNTING

PSE is fast easy to install by using screw mounting.



DIGITAL INPUT FOR START, STOP AND RESET

PSE is controlled through digital inputs using the internal 24 V DC source. This allows easy control with e.g. push buttons or relays.




OUTPUT SIGNAL RELAYS FOR RUN, TOP OF RAMP AND EVENT

Three output signal relays for indicating that the motor is running, that the softstarter is in top of ramp and if any event has happened. The relays can be used e.g. with pilot lights or to control a line contactor.



CLEAR MARKINGS ON THE FRONT FOR EASY INSTALLATION

All markings are on the front making it very easy to read after installation.

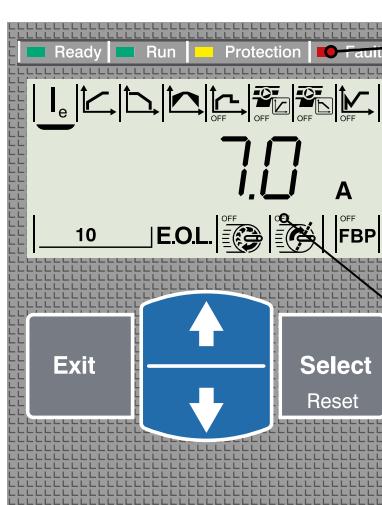

LED INDICATORS

- Green ready LED
Flashing - Supply available
Steady - Main available

- Green run LED
Flashing - Ramping up/down
Steady - TOR

- Yellow protection LED

- Red fault LED



ILLUMINATED AND LANGUAGE-NEUTRAL DISPLAY WITH ICONS

The display on PSE uses icons for fast and easy set-up of parameters. Each icon indicates a different parameter to set and makes navigation and setting of parameters easy. Set-up is done by using the four buttons on the keypad.

PSE - The efficient range

Overview



PSE18 ... PSE105

Normal start In-line connected (400 V) kW IEC, max. A (440-480 V) hp UL, max. FLA	PSE18	PSE25	PSE30	PSE37	PSE45	PSE60	PSE72	PSE85	PSE105		
7.5	11	15	18.5	22	30	37	45	55			
18	25	30	37	45	60	72	85	106			
10	15	20	25	30	40	50	60	75			
18	25	28	34	42	60	68	80	104			
400 V, 40 °C											
Using MCCB only, type 1 coordination will be achieved¹⁾								T3N250			
MCCB (35 kA)								T2N160			
MCCB (50 kA)								T2S160			
T2S160								T3S250			
To achieve type 2 coordination, semiconductor fuses must be used¹⁾											
Fuse protection (85 kA), Semiconductor fuses, Bussmann											
170M1563		170M1564	170M1566	170M1567	170M1568	170M1569	170M1571	170M1572	170M3819		
Suitable switch fuse for recommended semiconductor fuses¹⁾											
Switch fuse					OS63GD			OS125GD	OS250D		
The line contactor is not required for the softstarter itself but often used to open if OL trips¹⁾											
Line contactor		AF26		AF30	AF38	AF52	AF65	AF80	AF96		
									AF116		

¹⁾ This is an example of coordination. For more examples see: applications.it.abb.com/SOC

PSE - The efficient range

Overview



PSE142 ... PSE170



PSE210 ... PSE370

	PSE142	PSE170	PSE210	PSE250	PSE300	PSE370
Normal start In-line connected						
(400 V) kW	75	90	110	132	160	200
IEC, max. A	143	171	210	250	300	370
(440-480 V) hp	100	125	150	200	250	300
UL, max. FLA	130	169	192	248	302	361
400 V, 40 °C						
Using MCCB only, type 1 coordination will be achieved¹⁾	MCCB (35 kA)		T3N250	T4N320	T5N400	T5N630
	MCCB (50 kA)		T3S250	T4S320	T5S400	T5S630
To achieve type 2 coordination, semi- conductor fuses must be used¹⁾	Fuse protection (85kA), Semiconductor fuses, Bussmann					
	170M5809	170M5810	170M5812	170M5813	170M6812	170M6813
Suitable switch fuse for recommended semi- conductor fuses¹⁾	Switch fuse					
	OS400D				OS630D	
The line contactor is not required for the softstarter itself but often used to open if OL trips¹⁾	Line contactor					
	AF140	AF190	AF205	AF265	AF305	AF370

¹⁾ This is an example of coordination. For more examples see: applications.it.abb.com/SOC



PSE - The efficient range

Normal starts, class 10, in-line,
ordering details

Typical applications:

- Bow thruster
- Centrifugal pump
- Compressor
- Conveyorbelt (short)
- Elevator
- Escalator



If more than 10 starts/h, select one size larger than the standard selection.
For a more precise selection, use the online softstarter selection tool available by scanning the shown QR code or using the selection tool available on: new.abb.com/low-voltage/products/softstarters



PSE18 ... PSE105

PSE142 ... PSE170

PSE210 ... PSE370

Rated operational voltage U_e , 208...600 V

Rated control supply voltage U_c , 100...250 V AC, 50/60 Hz

IEC Rated operational power				UL/CSA Rated operational power				Type	Order code	Weight (1 pce)	
				current				current			
230 V	400 V	500 V		200 / 208 V	220 / 240 V	440 / 480 V	550 / 600 V	FLA			
P _e kW	P _e kW	P _e kW	I _e A	P _e hp	P _e hp	P _e hp	P _e hp	A			
4	7.5	11	18	5	5	10	15	18	PSE18-600-70	1SFA897101R7000	2.40 (5.29)
5.5	11	15	25	7.5	7.5	15	20	25	PSE25-600-70	1SFA897102R7000	2.40 (5.29)
7.5	15	18.5	30	7.5	10	20	25	28	PSE30-600-70	1SFA897103R7000	2.40 (5.29)
9	18.5	22	37	10	10	25	30	34	PSE37-600-70	1SFA897104R7000	2.40 (5.29)
11	22	30	45	10	15	30	40	42	PSE45-600-70	1SFA897105R7000	2.40 (5.29)
15	30	37	60	20	20	40	50	60	PSE60-600-70	1SFA897106R7000	2.40 (5.29)
18.5	37	45	72	20	25	50	60	68	PSE72-600-70	1SFA897107R7000	2.50 (5.51)
22	45	55	85	25	30	60	75	80	PSE85-600-70	1SFA897108R7000	2.50 (5.51)
30	55	75	106	30	40	75	100	104	PSE105-600-70	1SFA897109R7000	2.50 (5.51)
40	75	90	143	40	50	100	125	130	PSE142-600-70	1SFA897110R7000	4.20 (9.26)
45	90	110	171	60	60	125	150	169	PSE170-600-70	1SFA897111R7000	4.20 (9.26)
59	110	132	210	60	75	150	200	192	PSE210-600-70	1SFA897112R7000	12.40 (27.34)
75	132	160	250	75	100	200	250	248	PSE250-600-70	1SFA897113R7000	13.90 (30.64)
90	160	200	300	100	100	250	300	302	PSE300-600-70	1SFA897114R7000	13.90 (30.64)
110	200	250	370	125	150	300	350	361	PSE370-600-70	1SFA897115R7000	13.90 (30.64)

PSE - The efficient range

Heavy-duty start, class 30, in-line,
ordering details



Typical applications

- Centrifugal fan
- Conveyor belt (long)
- Crusher
- Mill
- Mixer
- Stirrer



If more than 10 starts/h, select one size larger than the standard selection.
For a more precise selection, use the online softstarter selection tool available by scanning the shown QR code or using the selection tool available on: new.abb.com/low-voltage/products/softstarters



PSE18 ... PSE105

PSE142 ... PSE170

PSE210 ... PSE370

Rated operational voltage Ue, 208-600 V

Rated control supply voltage Us, 100-250 V AC, 50/60 Hz

IEC		UL/CSA		Type		Order code		Weight (1 pce)	
Rated operational		Rated operational							
power	current	power	current	power	current	power	FLA	kg	(lb)
230 V	400 V	500 V		200 / 208 V	220 / 240 V	440 / 480 V	550 / 600 V		
P _e	P _e	P _e	I _e	P _e	P _e	P _e	P _e	A	
kW	kW	kW	A	hp	hp	hp	hp		
3	5.5	7.5	12	3	3	7.5	10	11	PSE18-600-70 1SFA897101R7000 2.40 (5.29)
4	7.5	11	18	5	5	10	15	18	PSE25-600-70 1SFA897102R7000 2.40 (5.29)
5.5	11	15	25	7.5	7.5	15	20	25	PSE30-600-70 1SFA897103R7000 2.40 (5.29)
7.5	15	18.5	30	7.5	10	20	25	28	PSE37-600-70 1SFA897104R7000 2.40 (5.29)
9	18.5	22	37	10	10	25	30	34	PSE45-600-70 1SFA897105R7000 2.40 (5.29)
11	22	30	45	10	15	30	40	42	PSE60-600-70 1SFA897106R7000 2.40 (5.29)
15	30	37	60	20	20	40	50	60	PSE72-600-70 1SFA897107R7000 2.50 (5.51)
18.5	37	45	72	20	25	50	60	68	PSE85-600-70 1SFA897108R7000 2.50 (5.51)
22	45	55	85	25	30	60	75	80	PSE105-600-70 1SFA897109R7000 2.50 (5.51)
30	55	75	106	30	40	75	100	104	PSE142-600-70 1SFA897110R7000 4.20 (9.26)
40	75	90	143	40	50	100	125	130	PSE170-600-70 1SFA897111R7000 4.20 (9.26)
45	90	110	171	60	60	125	150	169	PSE210-600-70 1SFA897112R7000 12.40 (27.34)
59	110	132	210	60	75	150	200	192	PSE250-600-70 1SFA897113R7000 13.90 (30.64)
75	132	160	250	75	100	200	250	248	PSE300-600-70 1SFA897114R7000 13.90 (30.64)
90	160	200	300	100	100	250	300	302	PSE370-600-70 1SFA897115R7000 13.90 (30.64)

PSE - The efficient range

Accessories


	For softstarter type	Wire range	Tightening torque max.	Type	Order code	Pkg qty	Weight (1 pce)
 1SFT98099_095C2 SBB954C2		mm ²	Nm			kg	(lb)
Cable connectors for Cu cables							
PSE142 ... PSE170	6...120	14	—	1SDA066917R1	3	0.113	(0.249)
PSE142 ... PSE170	2 x (50...120)	16	LZ185-2C/120	1SFN074709R1000	3	0.100	(0.220)
PSE210 ... PSE370	16...300	25	—	1SDA055016R1	3	0.133	(0.293)
 1SFT98099_010C1		mm ²	Nm			kg	(lb)
Cable connectors for Al and Cu cables							
PSE142 ... PSE170	95...185	31	—	1SDA054988R1	3	0.078	(0.172)
PSE210 ... PSE370	185...240	43	—	1SDA055020R1	3	0.133	(0.293)
 1SFT98000_010C3		Dimensions hole ø mm ²	bar mm ²	Type	Order code	Pkg qty	Weight (1 pce)
Terminal enlargements							
PSE18 ... PSE105	6.5	15 x 3	LW110	1SFN074307R1000	1	0.100	(0.220)
PSE142 ... PSE170	10.5	17.5 x 5	LW185	1SFN074707R1000	1	0.450	(0.992)
PSE210 ... PSE370	10.5	20 x 5	LW300	1SFN075107R1000	1	1.230	(2.712)
 1SFT98099_019C5		Req. qty	Type	Order code	Pkg qty	Weight (1 pce)	
Terminal shrouds							
LT ... -AC	PSE142 ... PSE170, short for use with cable clamps	2	LT185-AC	1SFN124701R1000	2	0.050	(0.110)
LT ... -AL	PSE142 ... PSE170, long for use with compression lugs	2	LT185-AL	1SFN124703R1000	2	0.220	(0.485)
	PSE210 ... PSE370, short for use with cable clamps	2	LT300-AC	1SFN125101R1000	2	0.070	(0.154)
	PSE210 ... PSE370, long for use with compression lugs	2	LT300-AL	1SFN125103R1000	2	0.280	(0.617)
 1SFC132328F002		Type	Order code	Pkg qty	Weight (1 pce)		
External keypad including a 3m cable							
PSEEK	PSEEK		1SFA897100R1001	1	0.198	(0.437)	
 1SFC132355F002		Type	Order code	Pkg qty	Weight (1 pce)		
USB cable for Service Engineer Tool							
PSECA	PSE18 ... PSE370	PSECA	1SFA897201R1001	1	0.130	(0.287)	
 1SFC132168F0001		Type	Order code	Pkg qty	Weight (1 pce)		
FieldBusPlug connection accessory							
PS-FBPA	PSE18 ... PSE370	PS-FBPA	1SFA896312R1002	1	0.060	(0.132)	

PSE - The efficient range

Technical data

Tripping curves for the integrated electronic overload protection

PSE has an integrated electronic overload protection that can be set to four different tripping classes. Below you find a curve for each tripping class in cold state.

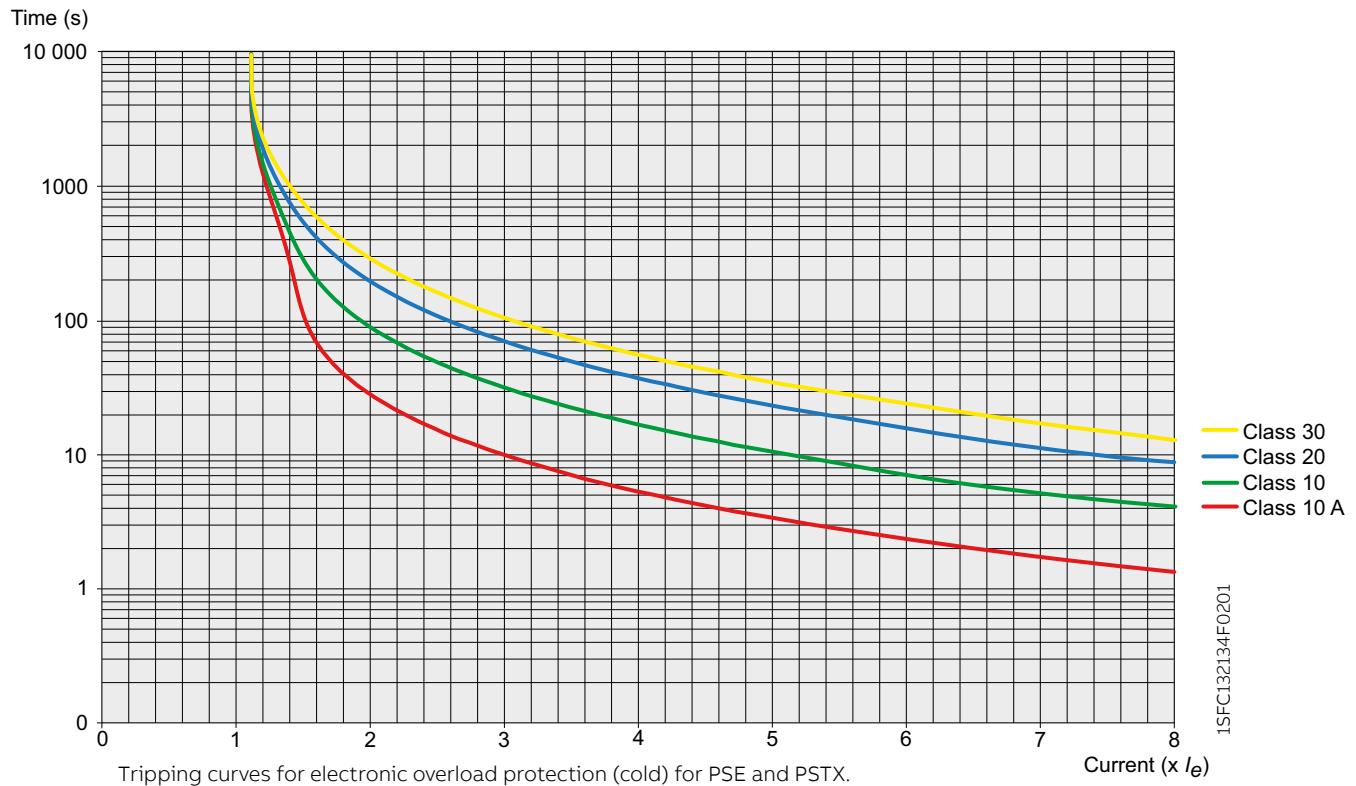

PSE - The efficient range

Technical data

Softstarter type	PSE18 ... PSE370	
Rated insulation voltage U_i	600 V	
Rated operational voltage U_e	208...600 V +10%/-15%	
Rated control supply voltage U_s	100...250 V +10%/-15%, 50/60 Hz ±10 %	
Rated control circuit voltage U_c	Internal 24 V DC	
Starting capacity at I_e	$4 \times I_e$ for 10 sec.	
Number of starts per hour	10 ¹⁾	
Overload capability	Overload class	10
Ambient temperature	During operation	-25...+60 °C (-13...+140 F) ²⁾
	During storage	-40...+70 °C (-40...+158 F)
Maximum Altitude		4000 m (13123 ft) ³⁾
Degree of protection	Main circuit	IP00
	Supply and control circuit	IP20
Main circuit	Built-in bypass	Yes
	Cooling system - fan cooled (thermostat controlled)	Yes
HMI for settings	Display	4 7-segments and icons. Illuminated
	Keypad	2 selection keys and 2 navigation keys
Main settings	Setting current	Size dependent
	Ramp time during start	1...30 sec
	Ramp time during stop	0...30 sec
	Initial/end voltage	30...70%
	Current limit	1.5...7 x I_e
	Torque control for start	Yes / No
	Torque control for stop	Yes / No
	Kick start	Off, 30...100%
Signal relays	Number of signal relays	3
	K2	Run signal
	K3	TOR (bypass) signal
	K1	Event signal
	Rated operational voltage U_e	250 V AC/24 V DC ⁴⁾
	Rated thermal current I_{th}	3 A
	Rated operational current I_e at AC-15 ($U_e = 250$ V)	1.5 A
Analog output	Output signal reference	4...20 mA
	Type of output signal	1 Amp
	Scaling	Fixed at 1.2 x I_e
Control circuit	Number of inputs	3 (start, stop, reset of faults)
Signal indication LED	On / Ready	Green flashing / steady
	Run / TOR	Green flashing / steady
	Protection	Yellow
	Fault	Red
Protections	Electronic overload	Yes (Class 10A, 10, 20, 30)
	Locked rotor protection	Yes
	Underload protection	Yes
Fieldbus connection	Connection for ABB FieldBusPlug	Yes (option)
External keypad	Display	LCD type
	Ambient temperature	
	During operation	-25...+60 °C (-13...+140 F)
	During storage	-40...+70 °C (-40...+158 F)
	Degree of protection	IP66



¹⁾ Valid for 50% on time and 50% off time. If other data is required, contact your local ABB office.

²⁾ Above 40 °C (104 F) up to max. 60 °C (140 F) reduce the rated current with 0.6% per °C (0.33% per F).

³⁾ When used at high altitudes, above 1000 meters (3281 ft) up to 4000 meters (13123 ft), de-rate the rated current using the following formula. [% of $I_e = 100 - x - 1000$] x = actual altitude of the softstarter in meters.

PSE - The efficient range

Technical data

Main terminals	PSE18 ... PSE105	PSE142 ... PSE170	PSE210 ... PSE370
			
 Cu cable - Flexible .1 x mm ²	2.5...70 mm ²	6...120 mm ²	16...300 mm ²
Clamp type	Included	1SDA066917R1	1SDA055016R1
Tightening torque	8 Nm	14 Nm	25 Nm
 Cu cable - Flexible 2 x mm ²	2.5...70 mm ²	50...120 mm ²	-
Clamp.type	Included	1SFN074709R1000	-
Tightening torque	8 Nm	16 NM	-
 Cu cable - Stranded .1 x mm ²	2.5...70 mm ²	6...120 mm ²	16...300 mm ²
Clamp.type	Included	1SDA066917R1	1SDA055016R1
Tightening torque	8 Nm	14 Nm	25 Nm
 Cu cable - Stranded 2 x mm ²	2.5...70 mm ²	50...120 mm ²	-
Clamp type	Included	1SFN074709R1000	-
Tightening torque	8 Nm	16 NM	-
 Al cable - Stranded .1 x mm ²	-	95...185 mm ²	185...240
Clamp.type	-	1SDA054988R1	1SDA055020R1
Tightening torque	-	31 Nm	43 Nm
 Lugs Width	22 mm (0.866 in)	24 mm (0.945 in)	30 mm (1.181 in)
Diameter>=	6.5 mm (0.256 in)	8.5 mm (0.335 in)	10.2 mm (0.402 in)
Tightening torque	9 Nm (80 in lb)	18 Nm (159 in lb)	28 Nm (248 in lb)
Connection capacity acc to UL / CSA 1 x AWG / kcmil	6...2/0	6...300 kcmil	4...400 kcmil
Clamp.type	Included	ATK185	ATK300
Tightening torque	71 in lb	300 in lb	375 in lb
Connection capacity acc to UL / CSA 2 x AWG / kcmil	-	-	4...500 kcmil
Clamp.type	-	-	ATK300/2
Tightening torque	-	-	375 in lb
Supply and control circuit	Cu cable - Stranded .1 x mm ²	0.75...2.5 mm ² (19...14 AWG)	
	Cu cable - Stranded .2 x mm ²	0.75...1.5 mm ² (19...16 AWG)	
	Tightening torque	0.5 Nm (4.4 in lb)	

Fuse ratings and power losses


For softstarter	Current range	Max power loss at rated I _e	Max fuse rating - main circuit ¹⁾			Power requirements supply circuit Holding (VA) / Pull-in (VA)
			A	Type	Size	
PSE18	5.4...18.0	0.2	40	170M1563	000	16/19.9
PSE25	7.5...25.0	0.4	50	170M1564	000	16/19.9
PSE30	9.0...30.0	0.5	80	170M1566	000	16/19.9
PSE37	11.1...37.0	0.8	100	170M1567	000	16/19.9
PSE45	13.5...45.0	1.2	125	170M1568	000	16/19.9
PSE60	18.0...60.0	2.2	160	170M1569	000	16/19.9
PSE72	21.6...72.0	3.1	250	170M1571	000	16/19.9
PSE85	25.5...85.0	4.3	315	170M1572	000	16/19.9
PSE105	31.8...106.0	6.6	400	170M3819	1*	16/19.9
PSE142	42.9...143.0	12.1	450	170M5809	2	16/31
PSE170	51.3...171.0	17.6	500	170M5810	2	16/31
PSE210	63.0...210.0	8.8	630	170M5812	2	30/716
PSE250	75.0...250.0	12.5	700	170M5813	2	30/716
PSE300	90.6...302.0	18.0	800	170M6812	3	30/716
PSE370	111.0...370.0	27.4	900	170M6813	3	30/716

¹⁾ For the supply circuit 6 A delayed, for MCB use C characteristics.


PSE - The efficient range

Dimensions





PSE18 ... PSE105

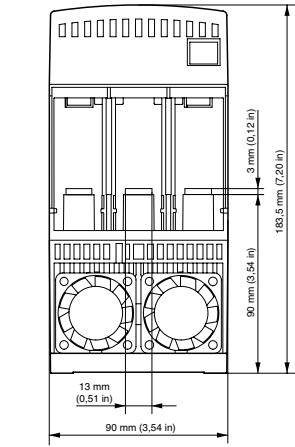



PSE142 ... PSE170

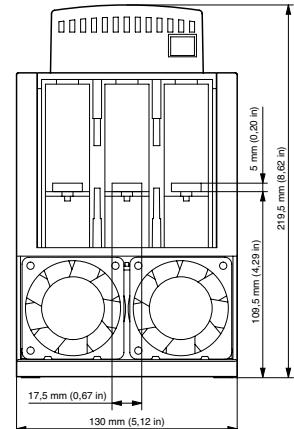

PSE210 ... PSE370

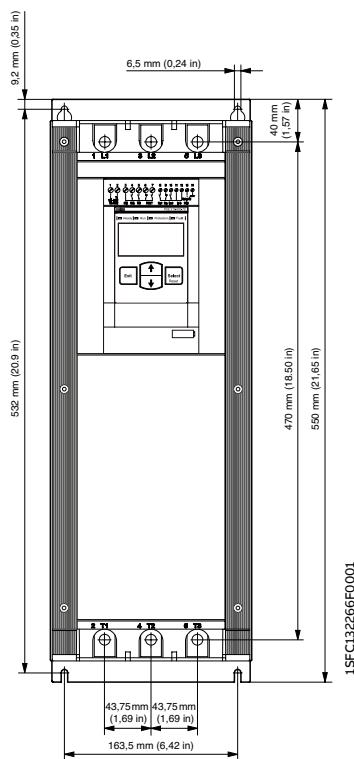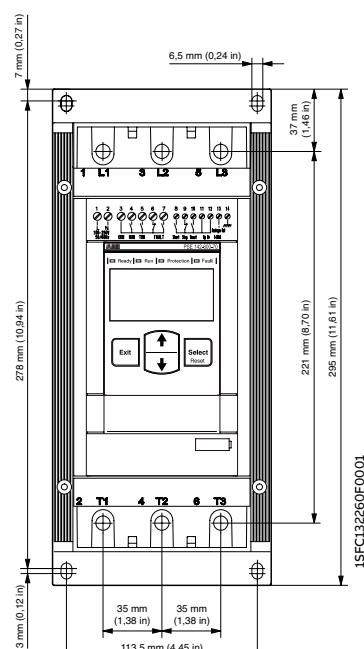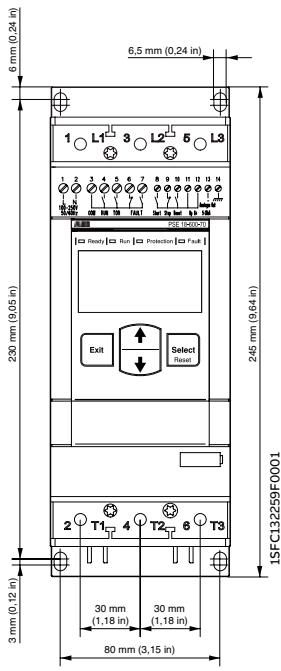


PSE external keypad (PSEEK)

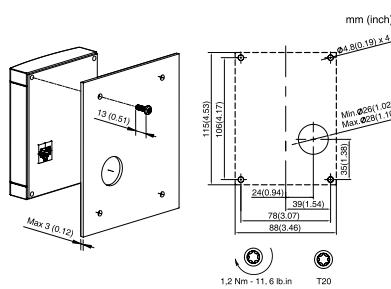


PSE - The efficient range

Circuit diagrams

PSE18 ... PSE370
With MCCB and line contactor

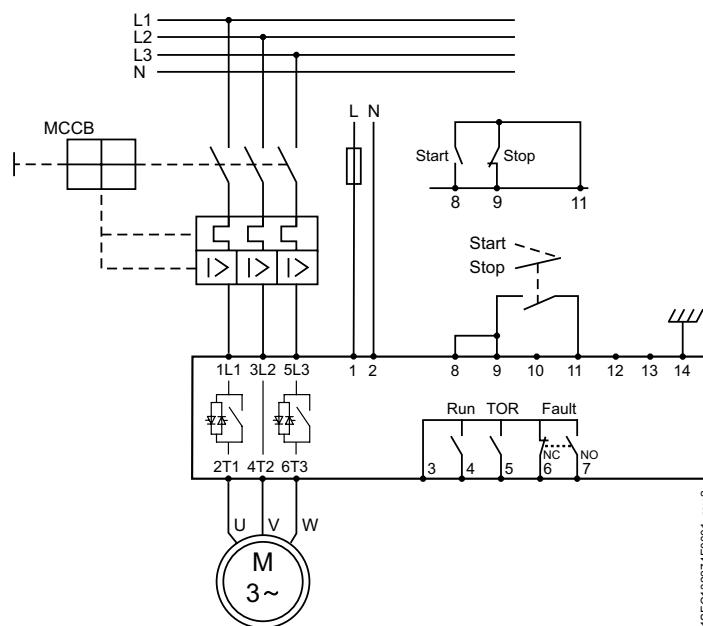

With fuses and line contactor

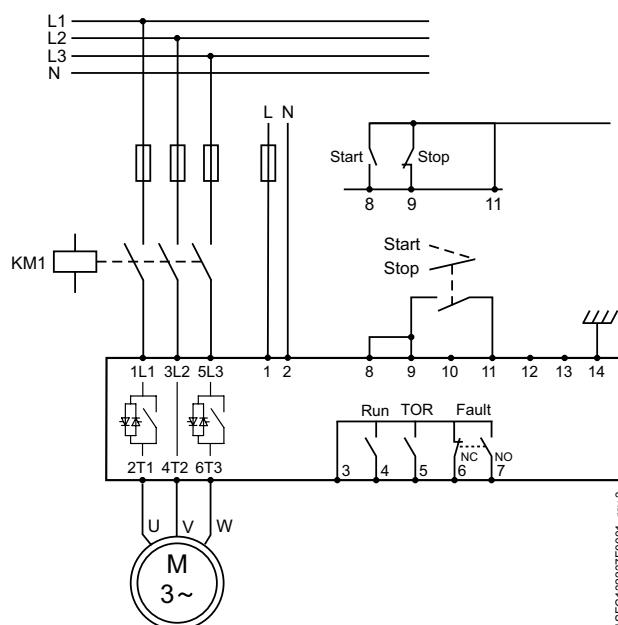



The PSTX combines many years of research and product development with extensive knowledge of application specific requirements and needs. It is our latest advancement in motor control & protection, and it adds new functionality and increased reliability.

PSTX - The advace range

40–41	Introduction
42–43	Overview
44–47	Ordering details
48–49	Accessories
50–53	Technical data
54–55	Dimensions
56–57	Circuit diagrams

PSTX - The advanced range

Introduction



- Three-phase controlled
- Operational voltage: 208 – 690 VAC
- Wide rated control supply voltage: 100 – 250 V, 50/60 Hz
- PSTX rated operational current: 30 to 1250 A
- (inside-delta: 2160 A)
- Both in-line and inside-delta connection
- Coated circuit boards
- protecting from dust, moist and corrosive atmosphere
- Detachable keypad rated IP66 (Type 1, 4X,12)
- Graphical display with 17 languages for easy setup and operation
- Built-in bypass for energy saving and easy installation
- Built-in Modbus RTU for monitoring and control
- Support for all major communication protocols
- Analog output for measurement of current, voltage, power factor etc.

SECURE MOTOR

Reliability



COMPLETE MOTOR PROTECTION

The PSTX offers complete motor protection in only one unit and is able to handle both load and network irregularities. PT-100, earth fault protection and over/under voltage protection along with many other functions keep your motor safer than ever.

THREE TYPES OF CURRENT LIMIT

PSTX offers three types of current limit: standard, dual and ramp. This gives you full control of your motor during start. It also allows you to use your motor in weaker networks.

IMPROVE INSTALLATION

Efficiency



BUILT-IN BYPASS SAVES TIME AND ENERGY

When reaching full speed, the PSTX will activate its bypass. This saves energy while reducing the softstarter's heat generation. On the PSTX, the bypass is built in and verified by ABB, saving you time during installation and space in your panel.

EASY-TO-USE AND DETACHABLE KEYPAD

A user-friendly and clear display saves you time and resources during both setup and operation. The detachable keypad is standard on all PSTX softstarters.

INCREASE APPLICATION

Productivity



COMPLETE CONTROL OF PUMPS

Time to use your processes to their full potential. The PSTX features many application enhancing features, including torque control: the most efficient way to start and stop pumps. The pump cleaning feature can reverse pump flow and clean out pipes, securing uptime of your pump system.

JOG WITH SLOW SPEED

The slow speed forward and backward jog feature will make you more flexible when operating e.g. conveyor belts and cranes. The PSTX provides positioning capabilities, letting you take control of your process.

**KEYHOLE MOUNTING FOR QUICK INSTALLATION**

The PSTX is simple and quick to install using keyhole mounting, saving you valuable time during the installation.

**A COMPACT MOTOR STARTING SOLUTION**


When your application reaches full speed, a bypass will reduce the softstarter's energy consumption. It also reduces heat generation which means you can save money by reducing the need of added cooling equipment. On the PSTX, the bypass is built in and verified by ABB.

**CLEAR MARKINGS ON THE FRONT**

With the PSTX, you do not need a manual to handle control circuit connections. With the self-explanatory markings on the front you can verify that the connections are done right. And with basic data on the front, identification is simple without having to take the product down.

**CUSTOMIZABLE**

The PSTX has 15 pre-installed languages along with options to customize your own specific home screens (up to seven different). You can use your customized home screens to show status information important to your process and hide information that is not.

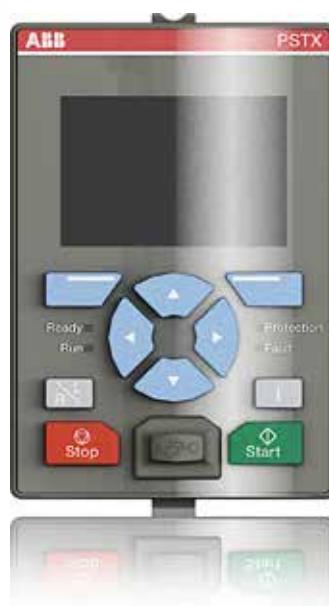**EASY TO LEARN**

A large graphical display along with built-in assistants make learning how to handle the PSTX fun and simple. The interface resembles other interfaces from ABB which will streamline and help with training of field personnel.

**DETACHABLE**

The PSTX comes with a detachable keypad as standard. It can be placed on your panel door, meaning you do not have to interrupt your process in order to read status information or to change settings.

PSTX - The advanced range

Overview



PSTX30... PSTX105



PSTX142... PSTX170

	PSTX30	PSTX37	PSTX45	PSTX60	PSTX72	PSTX85	PSTX105	PSTX142	PSTX170
Normal start	15	18.5	22	30	37	45	55	75	90
In-Line connected (400 V) kW	30	37	45	60	72	85	106	143	171
IEC, max. A (440-480 V) hp	20	25	30	40	50	60	75	100	125
UL, max. FLA	28	34	42	60	68	80	104	130	169
400 V, 40 °C									
Using manual motor starter or MCCB, type 1 coordination will be achieved.¹⁾	MCCB (50 kA)								XT4S250
	XT2S160								
Using gG fuses, type 1 coordination will be achieved. To achieve type 2 coordination, semiconductor fuses must be used.¹⁾	Fuse protection (80 kA), Semiconductor fuses, Bussmann								
	170M1567	170M1568	170M1569	170M1571	170M1572	170M3819	170M5810	170M5812	
Suitable switch fuse for the recommended semiconductor fuses.¹⁾	Switch fuse								
	OS32G	OS63G			OS125G		OS250	OS400	
The line contactor is not required for the softstarter itself but often used to open if OL trips¹⁾	Line contactor								
	AF30	AF38	AF52	AF65	AF80	AF96	AF116	AF140	AF190

¹⁾ This is an example of coordination. For more examples see: applications.it.abb.com/SOC

PSTX - The advanced range

Overview



	PSTX210	PSTX250	PSTX300	PSTX370	PSTX470	PSTX570	PSTX720	PSTX840	PSTX1050	PSTX1250
Normal start										
In-Line connected (400 V) kW	110	132	160	200	250	315	400	450	560	710
IEC, max. A (440-480 V) hp	210	250	300	370	470	570	720	840	1050	1250
UL, max. FLA	150	200	250	300	400	500	600	700	900	1000
	192	248	302	361	480	590	720	840	1062	1250

400 V, 40 °C

	MCCB (50 kA)					
Using manual motor starter or MCCB, type 1 coordination will be achieved. ¹⁾	T4S320	T5S400	T5S630	T7S800	T7S1250	E2.2N 2000

	Fuse protection (80 kA), Semiconductor fuses, Bussmann								
Using gG fuses, type 1 coordination will be achieved. To achieve type 2 coordination, semiconductor fuses must be used. ¹⁾	170M5812	170M5813	170M6812	170M6813	170M6814	170M8554	170M6018	170M6020	170M6021

	Switch fuse							
Suitable switch fuse for the recommended semiconductor fuses. ¹⁾	OS400		OS630		OS800		-	

	Line contactor									
The line contactor is not required for the softstarter itself but often used to open if OL trips. ¹⁾	AF205	AF265	AF305	AF370	AF460	AF580	AF750	AF1350	AF1650	-

¹⁾ This is an example of coordination. For more examples see: applications.it.abb.com/SOC



PSTX - The advanced range

Normal starts, class 10, in-line,
Ordering details

Typical applications

- Bow thruster
- Centrifugal pump
- Compressor
- Conveyor belt (short)
- Elevator



For a more precise selection, use the
online softstarter selection tool available
by scanning the shown QR code or using
the selection tool available on: new.abb.com/low-voltage/products/softstarters



Rated operational voltage Ue, 208...600 V, Rated control supply voltage Us, 100...250 V AC, 50/60 Hz

IEC		UL/CSA		Type	Order code	Weight (1 pce)					
Rated operational power		Rated operational current									
400V	500V	690V		200/208V	220/240V	440/480V	550/600V				
Pe kW	Pe kW	Pe kW	Ie A	Pe hp	Pe hp	Pe hp	FLA A			kg (lb)	
15	18.5	-	30	7.5	10	20	25	28	PSTX30-600-70	1SFA898103R7000	6.10 (13.45)
18.5	22	-	37	10	10	25	30	34	PSTX37-600-70	1SFA898104R7000	6.10 (13.45)
22	25	-	45	10	15	30	40	42	PSTX45-600-70	1SFA898105R7000	6.10 (13.45)
30	37	-	60	20	20	40	50	60	PSTX60-600-70	1SFA898106R7000	6.10 (13.45)
37	45	-	72	20	25	50	60	68	PSTX72-600-70	1SFA898107R7000	6.10 (13.45)
45	55	-	85	25	30	60	75	80	PSTX85-600-70	1SFA898108R7000	6.10 (13.45)
55	75	-	106	30	40	75	100	104	PSTX105-600-70	1SFA898109R7000	6.10 (13.45)
75	90	-	143	40	50	100	125	130	PSTX142-600-70	1SFA898110R7000	9.60 (21.16)
90	110	-	171	50	60	125	150	169	PSTX170-600-70	1SFA898111R7000	9.60 (21.16)
110	132	-	210	60	75	150	200	192	PSTX210-600-70	1SFA898112R7000	12.70 (27.99)
132	160	-	250	75	100	200	250	248	PSTX250-600-70	1SFA898113R7000	12.70 (27.99)
160	200	-	300	100	100	250	300	302	PSTX300-600-70	1SFA898114R7000	12.70 (27.99)
200	257	-	370	125	150	300	350	361	PSTX370-600-70	1SFA898115R7000	12.70 (27.99)
250	315	-	470	150	200	400	500	480	PSTX470-600-70	1SFA898116R7000	25.00 (55.12)
315	400	-	570	200	200	500	600	590	PSTX570-600-70	1SFA898117R7000	25.00 (55.12)
400	500	-	720	250	300	600	700	720	PSTX720-600-70	1SFA898118R7000	46.20 (101.85)
450	600	-	840	300	350	700	800	840	PSTX840-600-70	1SFA898119R7000	46.20 (101.85)
560	730	-	1050	400	450	900	1000	1062	PSTX1050-600-70	1SFA898120R7000	64.20 (141.54)
710	880	-	1250	400	500	1000	1200	1250	PSTX1250-600-70	1SFA898121R7000	64.70 (142.64)

Rated operational voltage Ue, 208...690 V, Rated control supply voltage Us, 100...250 V AC, 50/60 Hz

15	18.5	25	30	7.5	10	20	25	28	PSTX30-690-70	1SFA898203R7000	6.10 (13.45)
18.5	22	30	37	10	10	25	30	34	PSTX37-690-70	1SFA898204R7000	6.10 (13.45)
22	25	37	45	10	15	30	40	42	PSTX45-690-70	1SFA898205R7000	6.10 (13.45)
30	37	55	60	20	20	40	50	60	PSTX60-690-70	1SFA898206R7000	6.10 (13.45)
37	45	59	72	20	25	50	60	68	PSTX72-690-70	1SFA898207R7000	6.10 (13.45)
45	55	75	85	25	30	60	75	80	PSTX85-690-70	1SFA898208R7000	6.10 (13.45)
55	75	90	106	30	40	75	100	104	PSTX105-690-70	1SFA898209R7000	6.10 (13.45)
75	90	132	143	40	50	100	125	130	PSTX142-690-70	1SFA898210R7000	9.60 (21.16)
90	110	160	171	50	60	125	150	169	PSTX170-690-70	1SFA898211R7000	9.60 (21.16)
110	132	184	210	60	75	150	200	192	PSTX210-690-70	1SFA898212R7000	12.70 (27.99)
132	160	220	250	75	100	200	250	248	PSTX250-690-70	1SFA898213R7000	12.70 (27.99)
160	200	257	300	100	100	250	300	302	PSTX300-690-70	1SFA898214R7000	12.70 (27.99)
200	257	355	370	125	150	300	350	361	PSTX370-690-70	1SFA898215R7000	12.70 (27.99)
250	315	450	470	150	200	400	500	480	PSTX470-690-70	1SFA898216R7000	25.00 (55.12)
315	400	560	570	200	200	500	600	590	PSTX570-690-70	1SFA898217R7000	25.00 (55.12)
400	500	710	720	250	300	600	700	720	PSTX720-690-70	1SFA898218R7000	46.20 (101.85)
450	600	800	840	300	350	700	800	840	PSTX840-690-70	1SFA898219R7000	46.20 (101.85)
560	730	1000	1050	400	450	900	1000	1062	PSTX1050-690-70	1SFA898220R7000	64.20 (141.54)
710	880	1200	1250	400	500	1000	1200	1250	PSTX1250-690-70	1SFA898221R7000	64.70 (142.64)



PSTX - The advanced range

Heavy-duty, class 30, in-line,
Ordering details

Typical applications

- Centrifugal fan
- Conveyor belt (long)
- Crusher
- Mill
- Mixer
- Stirrer



For a more precise selection, use the
online softstarter selection tool available
by scanning the shown QR code or using
the selection tool available on: new.abb.com/low-voltage/products/softstarters




PSTX30 ... PSTX105 PSTX142 ... PSTX170 PSTX210 ... PSTX370 PSTX470 ... PSTX570 PSTX720 ... PSTX840 PSTX1050 ... PSTX1250

Rated operational voltage U_e , 208...600 V, Rated control supply voltage U_s , 100...250 V AC, 50/60 Hz

IEC		UL/CSA				Type	Order code	Weight (1 pce)
Rated operational power	current	Rated operational power	current	current				
400V	500V	690V		200/208 V	220/240 V	440/480 V	550/600 V	
P _e kW	P _e kW	P _e kW	I _e A	P _e hp	P _e hp	P _e hp	P _e hp	FLA A
11	15	-	22	5	7.5	15	20	25
15	18.5	-	30	7.5	10	20	25	28
18.5	22	-	37	10	10	25	30	34
22	25	-	45	10	15	30	40	42
30	37	-	60	20	20	40	50	60
37	45	-	72	20	25	50	60	68
45	55	-	85	25	30	60	75	80
55	75	-	106	30	40	75	100	104
75	90	-	143	40	50	100	125	130
90	110	-	171	50	60	125	150	169
110	132	-	210	60	75	150	200	192
132	160	-	250	75	100	200	250	248
160	200	-	300	100	100	250	300	302
200	257	-	370	125	150	300	350	361
250	315	-	470	150	200	400	500	480
315	400	-	570	200	200	500	600	590
400	500	-	720	250	300	600	700	720
450	600	-	840	300	350	700	800	840
560	730	-	1050	400	450	900	1000	1062

Rated operational voltage U_e , 208...690 V, Rated control supply voltage U_s , 100...250 V AC, 50/60 Hz

11	15	18.5	22	5	7.5	15	20	25	PSTX30-690-70	1SFA898203R7000	6.10	(13.45)
15	18.5	25	30	7.5	10	20	25	28	PSTX37-690-70	1SFA898204R7000	6.10	(13.45)
18.5	22	30	37	10	10	25	30	34	PSTX45-690-70	1SFA898205R7000	6.10	(13.45)
22	25	37	44	10	15	30	40	42	PSTX60-690-70	1SFA898206R7000	6.10	(13.45)
30	37	55	60	20	20	40	50	60	PSTX72-690-70	1SFA898207R7000	6.10	(13.45)
37	45	59	72	20	25	50	60	68	PSTX85-690-70	1SFA898208R7000	6.10	(13.45)
45	55	75	85	25	30	60	75	80	PSTX105-690-70	1SFA898209R7000	6.10	(13.45)
55	75	90	106	30	40	75	100	104	PSTX142-690-70	1SFA898210R7000	9.60	(21.16)
75	90	132	143	40	50	100	125	130	PSTX170-690-70	1SFA898211R7000	9.60	(21.16)
90	110	160	171	50	60	125	150	169	PSTX210-690-70	1SFA898212R7000	12.70	(27.99)
110	132	184	210	60	75	150	200	192	PSTX250-690-70	1SFA898213R7000	12.70	(27.99)
132	160	220	250	75	100	200	250	248	PSTX300-690-70	1SFA898214R7000	12.70	(27.99)
160	200	257	300	100	100	250	300	302	PSTX370-690-70	1SFA898215R7000	12.70	(27.99)
200	257	355	370	125	150	300	350	361	PSTX470-690-70	1SFA898216R7000	25.00	(55.12)
250	315	450	470	150	200	400	500	480	PSTX570-690-70	1SFA898217R7000	25.00	(55.12)
315	400	560	570	200	200	500	600	590	PSTX720-690-70	1SFA898218R7000	46.20	(101.85)
400	500	710	720	250	300	600	700	720	PSTX840-690-70	1SFA898219R7000	46.20	(101.85)
450	600	800	840	300	350	700	800	840	PSTX1050-690-70	1SFA898220R7000	64.20	(141.54)
560	730	1000	1050	400	450	900	1000	1062	PSTX1250-690-70	1SFA898221R7000	64.70	(142.64)



PSTX - The advanced range

Normal starts, class 10, inside delta,
ordering details

Typical applications:

- Bow thruster
- Centrifugal pump
- Compressor
- Conveyor belt (short)
- Elevator



For a more precise selection, use the
online softstarter selection tool available
by scanning the shown QR code or using
the selection tool available on: new.abb.com/low-voltage/products/softstarters



Rated operational voltage U_e, 208...600 V, Rated control supply voltage U_s, 100...250 V AC, 50/60 Hz

IEC		UL/CSA		Type		Order code		Weight (1 pce)		
Rated operational power	current	Rated operational power	current	current	FLA	A		kg	(lb)	
400 V	500 V	690 V	200/208V	220/240V	440/480V	550/600V				
Pe kW	Pe kW	Pe kW	Ie A	Pe hp	Pe hp	Pe hp				
25	30	-	52	10	15	30	48	PSTX30-600-70	1SFA898103R7000	6.10 (13.45)
30	37	-	64	15	20	40	58	PSTX37-600-70	1SFA898104R7000	6.10 (13.45)
37	45	-	76	20	25	50	72	PSTX45-600-70	1SFA898105R7000	6.10 (13.45)
55	75	-	105	30	40	75	103	PSTX60-600-70	1SFA898106R7000	6.10 (13.45)
59	80	-	124	30	40	75	100	PSTX72-600-70	1SFA898107R7000	6.10 (13.45)
75	90	-	147	40	50	100	125	PSTX85-600-70	1SFA898108R7000	6.10 (13.45)
90	110	-	181	60	60	150	180	PSTX105-600-70	1SFA898109R7000	6.10 (13.45)
132	160	-	245	75	75	150	200	PSTX142-600-70	1SFA898110R7000	9.60 (21.16)
160	200	-	300	75	100	200	250	PSTX170-600-70	1SFA898111R7000	9.60 (21.16)
184	250	-	360	100	125	250	300	PSTX210-600-70	1SFA898112R7000	12.70 (27.99)
220	295	-	430	150	150	350	450	PSTX250-600-70	1SFA898113R7000	12.70 (27.99)
257	355	-	515	150	200	450	500	PSTX300-600-70	1SFA898114R7000	12.70 (27.99)
355	450	-	640	200	250	500	600	PSTX370-600-70	1SFA898115R7000	12.70 (27.99)
450	600	-	814	250	300	600	700	PSTX470-600-70	1SFA898116R7000	25.00 (55.12)
540	700	-	987	300	350	700	800	PSTX570-600-70	1SFA898117R7000	25.00 (55.12)
710	880	-	1247	400	500	1000	1200	PSTX720-600-70	1SFA898118R7000	46.20 (101.85)
800	1000	-	1455	500	600	1200	1500	PSTX840-600-70	1SFA898119R7000	46.20 (101.85)
1000	1250	-	1810	600	700	1500	1800	PSTX1050-600-70	1SFA898120R7000	64.20 (141.54)
1200	1500	-	2160	800	900	1800	2000	PSTX1250-600-70	1SFA898121R7000	64.70 (142.64)

Rated operational voltage U_e, 208...690 V, Rated control supply voltage U_s, 100...250 V AC, 50/60 Hz

25	30	45	52	10	15	30	40	48	PSTX30-690-70	1SFA898203R7000	6.10 (13.45)
30	37	55	64	15	20	40	50	58	PSTX37-690-70	1SFA898204R7000	6.10 (13.45)
37	45	59	76	20	25	50	60	72	PSTX45-690-70	1SFA898205R7000	6.10 (13.45)
55	75	90	105	30	40	75	100	103	PSTX60-690-70	1SFA898206R7000	6.10 (13.45)
59	80	110	124	30	40	75	100	117	PSTX72-690-70	1SFA898207R7000	6.10 (13.45)
75	90	132	147	40	50	100	125	138	PSTX85-690-70	1SFA898208R7000	6.10 (13.45)
90	110	160	181	60	60	150	150	180	PSTX105-690-70	1SFA898209R7000	6.10 (13.45)
132	160	220	245	75	75	150	200	225	PSTX142-690-70	1SFA898210R7000	9.60 (21.16)
160	200	257	300	75	100	200	250	292	PSTX170-690-70	1SFA898211R7000	9.60 (21.16)
184	250	315	360	100	125	250	300	332	PSTX210-690-70	1SFA898212R7000	12.70 (27.99)
220	295	400	430	150	150	350	450	429	PSTX250-690-70	1SFA898213R7000	12.70 (27.99)
257	355	500	515	150	200	450	500	523	PSTX300-690-70	1SFA898214R7000	12.70 (27.99)
355	450	600	640	200	250	500	600	625	PSTX370-690-70	1SFA898215R7000	12.70 (27.99)
450	600	800	814	250	300	600	700	830	PSTX470-690-70	1SFA898216R7000	25.00 (55.12)
540	700	960	987	300	350	700	800	1020	PSTX570-690-70	1SFA898217R7000	25.00 (55.12)
710	880	1200	1247	400	500	1000	1200	1240	PSTX720-690-70	1SFA898218R7000	46.20 (101.85)
800	1000	1400	1455	500	600	1200	1500	1450	PSTX840-690-70	1SFA898219R7000	46.20 (101.85)
1000	1250	1700	1810	600	700	1500	1800	1830	PSTX1050-690-70	1SFA898220R7000	64.20 (141.54)
1200	1500	2000	2160	800	900	1800	2000	2160	PSTX1250-690-70	1SFA898221R7000	64.70 (142.64)



PSTX - The advanced range

Normal starts, class 30, inside delta,
ordering details

Typical applications:

- Centrifugal fan
- Conveyor belt (long)
- Crusher
- Mill
- Mixer
- Stirrer



For a more precise selection, use the
online softstarter selection tool available
by scanning the shown QR code or using
the selection tool available on: new.abb.com/low-voltage/products/softstarters



PSTX30 ... PSTX105 PSTX142 ... PSTX170 PSTX210 ... PSTX370 PSTX470 ... PSTX570 PSTX720 ... PSTX840 PSTX1050 ... PSTX1250

Rated operational voltage U_e , 208...600 V, Rated control supply voltage U_s , 100...250 V AC, 50/60 Hz

IEC		UL/CSA		Type	Order code	Weight					
Rated operational power		Rated operational current									
400 V	500 V	690 V	200/208V	220/240V	440/480V	550/600V	current			(1 pce)	
Pe	Pe	Pe	Ie	Pe	Pe	Pe	FLA				
kW	kW	kW	A	hp	hp	hp	A				
18.5	25	-	42	7.5	10	25	30	34	PSTX30-600-70	1SFA898103R7000	6.10 (13.45)
25	30	-	52	10	15	30	40	48	PSTX37-600-70	1SFA898104R7000	6.10 (13.45)
30	37	-	64	15	20	40	50	58	PSTX45-600-70	1SFA898105R7000	6.10 (13.45)
37	45	-	76	20	25	50	60	72	PSTX60-600-70	1SFA898106R7000	6.10 (13.45)
55	75	-	105	30	40	75	100	103	PSTX72-600-70	1SFA898107R7000	6.10 (13.45)
59	80	-	124	30	40	75	100	117	PSTX85-600-70	1SFA898108R7000	6.10 (13.45)
75	90	-	147	40	50	100	125	138	PSTX105-600-70	1SFA898109R7000	6.10 (13.45)
90	110	-	181	60	60	150	150	180	PSTX142-600-70	1SFA898110R7000	9.60 (21.16)
132	160	-	245	75	75	150	200	225	PSTX170-600-70	1SFA898111R7000	9.60 (21.16)
160	200	-	300	75	100	200	250	292	PSTX210-600-70	1SFA898112R7000	12.70 (27.99)
184	250	-	360	100	125	250	300	332	PSTX250-600-70	1SFA898113R7000	12.70 (27.99)
220	295	-	430	150	150	350	450	429	PSTX300-600-70	1SFA898114R7000	12.70 (27.99)
257	355	-	515	150	200	450	500	523	PSTX370-600-70	1SFA898115R7000	12.70 (27.99)
355	450	-	640	200	250	500	600	625	PSTX470-600-70	1SFA898116R7000	25.00 (55.12)
450	600	-	814	250	300	600	700	830	PSTX570-600-70	1SFA898117R7000	25.00 (55.12)
540	700	-	987	300	350	700	800	1020	PSTX720-600-70	1SFA898118R7000	46.20 (101.85)
710	880	-	1247	400	500	1000	1200	1240	PSTX840-600-70	1SFA898119R7000	46.20 (101.85)
800	1000	-	1455	500	600	1200	1500	1450	PSTX1050-600-70	1SFA898120R7000	64.20 (141.54)
1000	1250	-	1810	600	700	1500	1800	1830	PSTX1250-600-70	1SFA898121R7000	64.70 (142.64)

Rated operational voltage U_e , 208...690 V, Rated control supply voltage U_s , 100...250 V AC, 50/60 Hz

18.5	25	37	42	7.5	10	25	30	34	PSTX30-690-70	1SFA898203R7000	6.10 (13.45)
25	30	45	52	10	15	30	40	48	PSTX37-690-70	1SFA898204R7000	6.10 (13.45)
30	37	55	64	15	20	40	50	58	PSTX45-690-70	1SFA898205R7000	6.10 (13.45)
37	45	59	76	20	25	50	60	72	PSTX60-690-70	1SFA898206R7000	6.10 (13.45)
55	75	90	105	30	40	75	100	103	PSTX72-690-70	1SFA898207R7000	6.10 (13.45)
59	80	110	124	30	40	75	100	117	PSTX85-690-70	1SFA898208R7000	6.10 (13.45)
75	90	132	147	40	50	100	125	138	PSTX105-690-70	1SFA898209R7000	6.10 (13.45)
90	110	160	181	60	60	150	150	180	PSTX142-690-70	1SFA898210R7000	9.60 (21.16)
132	160	220	245	75	75	150	200	225	PSTX170-690-70	1SFA898211R7000	9.60 (21.16)
160	200	257	300	75	100	200	250	292	PSTX210-690-70	1SFA898212R7000	12.70 (27.99)
184	250	315	360	100	125	250	300	332	PSTX250-690-70	1SFA898213R7000	12.70 (27.99)
220	295	400	430	150	150	350	450	429	PSTX300-690-70	1SFA898214R7000	12.70 (27.99)
257	355	500	515	150	200	450	500	523	PSTX370-690-70	1SFA898215R7000	12.70 (27.99)
355	450	600	640	200	250	500	600	625	PSTX470-690-70	1SFA898216R7000	25.00 (55.12)
450	600	800	814	250	300	600	700	830	PSTX570-690-70	1SFA898217R7000	25.00 (55.12)
540	700	960	987	300	350	700	800	1020	PSTX720-690-70	1SFA898218R7000	46.20 (101.85)
710	880	1200	1247	400	500	1000	1200	1240	PSTX840-690-70	1SFA898219R7000	46.20 (101.85)
800	1000	1400	1455	500	600	1200	1500	1450	PSTX1050-690-70	1SFA898220R7000	64.20 (141.54)
1000	1250	1700	1810	600	700	1500	1800	1830	PSTX1250-690-70	1SFA898221R7000	64.70 (142.64)

PSTX - The advanced range

Accessories

For softstarter type	Wire range mm ²	Tightening torque max. Nm	Type	Order code	Pkg qty kg	Weight (1 pce) (lb)
 1SFT98099-095C2	Cable connectors for Cu cables					
PSTX142 ... PSTX170	6-120	8	-	1SDA066917R1	3	0.113 (0.249)
PSTX142 ... PSTX170	2 x (50-95)	16	LZ185-2C/120	1SFN074709R1000	3	0.300 (0.661)
PSTX210 ... PSTX370	16-240	25	-	1SDA055016R1	3	0.133 (0.293)
PSTX210 ... PSTX370	2 x (70-185)	22	OZXB4	1SCA022194R0890	3	0.570 (1.257)
PSTX470 ... PSTX570	2 x (120-240)	35	-	1SDA013922R1	3	0.570 (1.257)
PSTX570 ... PSTX1050	3 x (70-185)	45	-	1SDA013956R1	3	0.570 (1.257)
 SB8054C2	Cable connectors for Al cables					
PSTX142 ... PSTX170	95-185	31	-	1SDA054988R1	3	0.078 (0.172)
PSTX210 ... PSTX370	185-240	43	-	1SDA055020R1	3	0.133 (0.293)
PSTX470 ... PSTX1050	2 x (120-240)	31	-	1SDA023380R0001	3	0.110 (0.243)
For softstarter type	Dimensions hole ø mm ²	bar mm	Type	Order code	Pkg qty kg	Weight (1 pce) (lb)
 1SFT98099-012C3	Terminal extensions					
PSTX142 ... PSTX170	8.5	17.5 x 5	LX205	1SFN074810R1000	1	0.250 (5.551)
PSTX210 ... PSTX370	10.5	20 x 5	LX370	1SFN075410R1000	1	0.350 (0.772)
PSTX470 ... PSTX570	10.5	25 x 5	LX460	1SFN075710R1000	1	0.500 (1.102)
PSTX720 ... PSTX840	13	40 x 6	LX750	1SFN076110R1003	1	0.850 (1.874)
 1SFT98099-011C3	Terminal enlargements					
PSTX30 ... PSTX105	6.5	15 x 3	LW110	1SFN074307R1000	1	0.100 (0.220)
PSTX142 ... PSTX170	10.5	17.5 x 5	LW205	1SFN074807R1000	1	0.250 (5.551)
PSTX210 ... PSTX370	10.5	20 x 5	LW370	1SFN075407R1000	1	0.450 (0.992)
PSTX470 ... PSTX570	10.5	25 x 5	LW460	1SFN075707R1000	1	0.730 (1.609)
PSTX720 ... PSTX840	13	40 x 6	LW750	1SFN076107R1000	1	1.230 (2.712)
For softstarter type	Req. qty	Type	Order code	Pkg qty kg	Weight (1 pce) (lb)	
 1SFC13222FF002	Terminal nut washer					
PSTX142 ... PSTX170	6	LL205-30	1SFN074811R1000	6	0.200 (0.441)	
PSTX210 ... PSTX370	6	LL370-30	1SFN075411R1000	6	0.300 (0.661)	
PSTX210 ... PSTX370	2	PSLE-300	1SFA899221R1003	2	0.300 (0.661)	
PSTX470 ... PSTX570	6	PSLE460	1SFA899221R1004	6	0.600 (1.323)	
PSTX720 ... PSTX840	6	PSLE750	1SFA899221R1005	6	0.750 (1.653)	
 1SFT98099-019C3	Terminal shrouds					
PSTX142 ... PSTX170, short for use with cable clamps	2	LT205-30C	1SFN124801R1000	2	0.050 (0.110)	
PSTX142 ... PSTX170, long for use with compression lugs	2	LT205-30L	1SFN124803R1000	2	0.220 (0.485)	
PSTX210 ... PSTX370, short for use with cable clamps	2	LT370-30C	1SFN125401R1000	2	0.035 (0.077)	
PSTX210 ... PSTX370, long for use with compression lugs	2	LT370-30L	1SFN125403R1000	2	0.280 (0.617)	
PSTX210 ... PSTX370, long and deep for use with extending cable clamps, ATK300/2 and OZXB4	2	LT370-30D	1SFN125406R1000	2	0.150 (0.331)	
PSTX470 ... PSTX570, short for use with cable clamps	2	LT460-AC	1SFN125701R1000	2	0.100 (0.220)	
PSTX470 ... PSTX570, long for use with compression lugs	2	LT460-AL	1SFN125703R1000	2	0.800 (1.764)	
PSTX720 ... PSTX840, short for use with cable clamps	2	LT750-AC	1SFN126101R1000	2	0.120 (0.265)	
PSTX720 ... PSTX840, long for use with compression lugs	2	LT750-AL	1SFN126103R1000	2	0.825 (1.819)	

PSTX - The advanced range

Accessories

For softstarter type	Type	Order code	Pkg qty (1 pce)	Weight kg	(lb)
Anybus connection accessory for communication protocol					
Anybus suitable for PSTX30 ... PSTX1250					
DeviceNet	Profibus	AB-PROFIBUS-1	1SFA899300R1001	1	0.042 (0.093)
	DeviceNet	AB-DEVICENET-1	1SFA899300R1002	1	0.042 (0.093)
	Modbus-RTU	AB-MODBUS-RTU-1	1SFA899300R1003	1	0.042 (0.093)
Profibus Modbus-RTU	EtherNet/IP (1-port)	AB-ETHERNET-IP-1	1SFA899300R1005	1	0.042 (0.093)
	EtherNet/IP (2-port)	AB-ETHERNET-IP-2	1SFA899300R1006	1	0.042 (0.093)
	Modbus/TCP (1-port)	AB-MODBUS-TCP-1	1SFA899300R1007	1	0.042 (0.093)
	Modbus/TCP (2-port)	AB-MODBUS-TCP-2	1SFA899300R1008	1	0.042 (0.093)
	Profinet (2-port)	AB-PROFINET-2	1SFA899300R1010	1	0.042 (0.093)
FieldBusPlug connection accessory					
EtherNet/IP (1-port) Modbus/TCP (1-port)	PSTX30 ... PSTX1250	PS-FBPA	1SFA896312R1002	1	0.060 (0.132)
ABB's FieldBusPlug suitable for all sizes, see latest softstarter catalog.					
EtherNet/IP (2-port) Modbus/TCP (2-port)	I/O module, 24 V DC digital input	DX111-FBP.0	1SAJ611000R0101	1	0.220 (0.485)
Profinet (2-port)	PSTX30 ... PSTX1250				

PSTX - The advanced range

Technical data

Softstarter type	PSTX30 ... PSTX1250	
Rated insulation voltage U_i	690V	
Rated operational voltage U_e	208...600 V, 208...690V +10% / -15%, 50/60Hz ±10%	
Rated control supply voltage U_s	100...250 V +10% / -15%, 50/60Hz ±10%	
Rated control circuit voltage U_c	Internal or external 24 V DC	
Starting capacity at I_e	$4 \times I_e$ for 10 sec.	
Number of starts per hour	10 for PSTX30 ... PSTX370 ¹⁾	6 for PSTX470 ... PSTX1250 ¹⁾
Overload capability	Overload class 10	
Ambient temperature	During operation	-25...+60 °C, (-13...+140 F) ²⁾
	During storage	-40...+70 °C, (-40...+158 F)
Maximum altitude	4000 m (13123 ft) ³⁾	
Degree of protection	Main circuit	-
	Supply and control circuit	IP20
Main circuit	Built-in bypass contactor	Yes
	Cooling system - Fan cooled	Yes (thermostat controlled)
HMI for settings	Display	LCD type, graphical
(Human Machine Interface)	Languages	Arabic, Chinese, Czech, Dutch, English, Finnish, French, German, Greek, Indonesian, Italian, Polish, Portuguese, Russian, Spanish, Swedish and Turkish
	Keypad	2 selection keys, 4 navigation keys, start key, stop key, info key and remote/local key
Signal relays	Number of programmable signal relays	3 (each relay can be programmed to None, Run, Top of ramp, Event group 0-6, Sequence 1-3 Run, Sequence 1-3 Top of ramp or Run reverse)
	K4	Default as Run signal
	K5	Default as Top of Ramp (Bypass) signal
	K6	Default as Event group 0 (Faults)
	Rated operational voltage, U_e	250 V AC/24 V DC
	Rated thermal current I_{th}	5 A
	Rated operational current I_e at AC-15 ($U_e=250$ V)	1.5 A
Analog output	Output signal reference	0...10 V, 0...10 mA, 0...20 mA, 4...20 mA
	Type of output signal	Motor current (A), Main voltage (V), Active power (kW), Active power (HP), Reactive power (kVAr), Apparent power (kVArh), Active energy (kWh), Reactive energy (kVArh), cos phi, Motor temperature (%), Thyristor temperature (%), Motor voltage (%), Main frequency (Hz), PT100 temperature (centigrade), PTC resistance (Ohm)
Control circuit	Number of inputs	2 (start, stop)
	Number of additional programmable inputs	3 (each input can be programmed to: None, Reset, Enable, Slow speed forward (Jog), Slow speed reverse (Jog), Motor heating, Stand still brake, Start reverse, User defined protection, Emergency mode (active high), Emergency mode (active low), Fieldbus disable control, Start 1, Start 2, Start 3, Switch to remote control or Cancel brake)
Signalling indication LED	Ready	Green
	Run	Green
	Fault	Red
	Protection	Yellow
External keypad	Detachable keypad	Yes
	Display	LCD type, graphical
	Ambient temperature	
	During operation	-25...+60 °C, (-13...+140 F)
	During storage	-40...+70 °C, (-40...+158 F)
	Degree of protection	IP66 (Type 1, 4X, 12)
Start and stop functions	Soft start with voltage ramp	Yes
	Soft stop with voltage ramp	Yes
	Soft start with torque control	Yes
	Soft stop with torque control	Yes
	Kick start	Yes
	Full voltage start	Yes
	Sequence start	Yes, 3 different sets of settings
	Current limit	Yes
	Dual current limit	Yes
	Current limit ramp	Yes
	Torque limit	Yes
	Pre-start function	Yes (Motor heating or Stand still brake)
	Jog with slow speed, forward and reverse	Yes (3 speed levels)
	Start reverse (external contactors)	Yes
	Dynamic brake	Yes
Field bus connection	Built-in Modbus RTU	Yes
	Connection for Anybus	Yes
	Connection for ABB FieldBusPlug	Yes, with adapter

¹⁾ Valid for normal start (class 10) for 50% on time and 50% off time. If other data is required, contact your local ABB office.

²⁾ Above 40 °C (104 F) up to max. 60 °C (140 F) reduce the rated current with 0,8% per °C (0,44% per F).

³⁾ When used at high altitudes, above 1000 meters (3281 ft) up to 4000 meters (13123 ft), de-rate the rated current using the following formula.

[% of $I_e = 100 - \frac{1000}{x} \cdot 1000$] x = actual altitude of the softstarter in meter, [% of $I_e = 100 - \frac{3280}{x} \cdot 3280$] x = actual altitude of the softstarter in feet. For de-rating of voltage, contact your local ABB office.

PSTX - The advanced range

Technical data

Softstarter type		PSTX30 ... PSTX1250
Protections		
Electronic overload protection, EOL	Yes (Class 10A, 10, 20, 30)	
Dual overload (separate overload for start and run)	Yes	
PTC connection	Yes	
PI-100 connection	Yes	
Locked rotor protection	Yes	
Current underload protection	Yes	
Current imbalance protection	Yes	
Power factor underload protection	Yes	
Under voltage protection	Yes	
Over voltage protection	Yes	
Voltage imbalance protection	Yes	
Earth fault protection / ground fault protection	Yes	
Phase reversal protection	Yes	
24 V output protection	Yes	
Frequency range protection	Yes	
Bypass open protection	Yes	
User defined protection	Yes	
Too long current limit protection	Yes	
HMI failure protection	Yes	
Fieldbus failure protection	Yes	
Extension IO failure protection	Yes	
Max number of starts/hour	Yes	
Too long start time protection	Yes	
Warnings		
Current underload warning	Yes	
Current imbalance warning	Yes	
Voltage imbalance warning	Yes	
Thyristor overload warning (SCR)	Yes	
Electronic overload Time-to-trip	Yes	
Short circuit warning (for Limp mode)	Yes	
Over voltage warning	Yes	
Under voltage warning	Yes	
Power factor underload warning	Yes	
Locked rotor warning	Yes	
Faulty fan warning	Yes	
THD(U) - Total Harmonic Distortion warning	Yes	
Motor runtime limit warning	Yes	
Phase loss warning (for stand by)	Yes	
EOL warning	Yes	
External faults detection		
Phase loss	Yes	
High current	Yes	
Low control supply voltage	Yes	
Faulty usage (e.g. using limp mode inside-delta)	Yes	
Faulty connection	Yes	
Bad network quality	Yes	
Internal faults detection		
Thyristor overload	Yes	
Short circuit	Yes	
Open circuit thyristor or gate	Yes	
Heat sink over temperature	Yes	
Shunt fault	Yes	
PTC input		
Switch off resistance	2825 ohm ± 20%	
Switch on resistance	1200 ohm ± 20%	
Other functions		
Real time clock	Yes	
Event log	Yes	
Emergency mode	Yes	
Automatic restart	Yes	
Secure settings	Yes	
Keypad password	Yes	
Electronic overload Time-to-cool	Yes	
Thyristor runtime measurement	Yes	
Auto phase sequence detection	Yes	
Electricity metering	Yes	
Motor heating	Yes	
Stand still brake	Yes	
Voltage sags detection	Yes	
Limp mode with two-phase motor control if one set of thyristors is shorted	Yes	

For all functions and features see installation and commissioning manual, 1SFC132081M0201 available on new.abb.com/low-voltage/products/softstarters.

PSTX - The advanced range

Technical data

Fuse ratings and power losses

For softstarter	Current range	Max power loss at rated I_e	Max fuse rating - main circuit ¹⁾ ²⁾ Bussmann fuses, DIN43 620 (Knife)			Power requirements supply circuit Holding (VA) / Pull-in (VA)
Type	A	W	A	Type	Size	
PSTX30	9.0...30.0	0.8	100	170M1567	000	49/51
PSTX37	11.1...37.0	1.2	125	170M1568	000	49/51
PSTX45	13.5...45.0	1.8	160	170M1569	000	49/51
PSTX60	18.0...60.0	3.2	160	170M1569	000	49/51
PSTX72	21.6...72.0	4.7	250	170M1571	000	49/51
PSTX85	22.5...85.0	6.5	315	170M1572	000	49/51
PSTX105	31.8...106.0	10	400	170M3819	1*	49/51
PSTX142	42.9...143.0	18	500	170M5810	2	49/53
PSTX170	51.3...171.0	26	630	170M5812	2	49/53
PSTX210	63.0...210.0	48	630	170M5812	2	56/276
PSTX250	75.0...250.0	68	700	170M5813	2	56/276
PSTX300	90.0...300.0	97	800	170M6812	3	56/276
PSTX370	111.0...370.0	148	900	170M6813	3	56/276
PSTX470	141.0...470.0	99	900	170M6813	3	67/434
PSTX570	171.0...570.0	146	1000	170M6814	3	67/434
PSTX720	216.0...720.0	78	1250	170M8554	3	61/929
PSTX840	252.0...840.0	106	1500	170M6018	3	61/929
PSTX1050 ³⁾	315.0...1050.0	165	1800	170M6020	3	68/929
PSTX1250 ^{3),4)}	375.0...1250.0	234	2000	170M6021	3	68/929

¹⁾ For the supply circuit 6 A delayed, for MCB use C characteristics.

²⁾ For inside delta connection the fuses shall be placed inside the delta. Contact ABB for more information.


³⁾ 170M6019 with fuse rating 1600 A should be used for 690 V version.

⁴⁾ For 690 V version, Bussmann fuses are only available for motors with rated current up to 1150 A.

PSTX Integrated bypass ratings

Softstarter	PSTX470	PSTX570	PSTX720	PSTX840	PSTX1050	PSTX1250
Integrated contactor	AF370			AF750		AF1250
AC-3 rating at 400 V (A)	370			750		-
IEC AC-3 Rated operational power at 400 V (kW)	200			400		-
UL/CSA 3-phase motor rating at 480 V (hp)	300			600		-

Tripping curves for the integrated electronic overload protection. All units have an integrated electronic overload protection that can be set to four different tripping classes. Below you find a curve for each tripping class in cold state. These tripping curves are valid for PSTX.

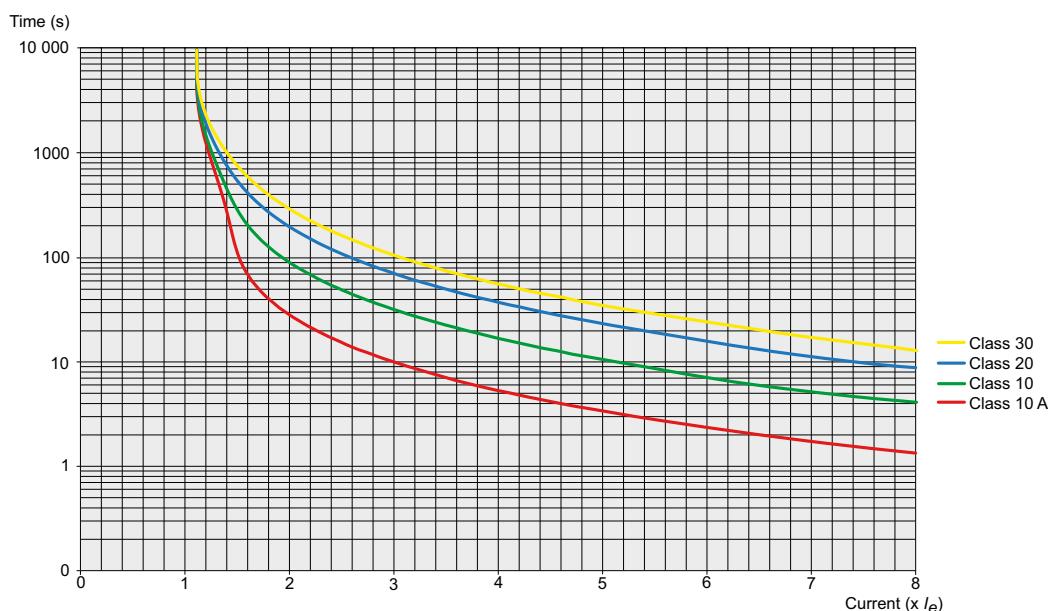

Tripping curves for electronic overload protection (cold) for PSE and PSTX.

PSTX - The advanced range

Technical data

Main terminals	PSTX30 ... PSTX105	PSTX142 ... PSTX170	PSTX210 ... PSTX370	PSTX470 ... PSTX570	PSTX720 ... PSTX1050	PSTX1250
Cu cable - flexible Clamp type	1 x mm ² Included	10...70 mm ² 17.5 5 0.85	6...120 mm ² 20 5 0.85	16...240 mm ² 25 6 22.5 0.10.5	- - - - -	- - -
Tightening torque	8 Nm	14 Nm	25 Nm			
Cu cable - flexible Clamp type	2 x mm ² Included	6...35 mm ² LZ185-2C/120	50...95 mm ² OZXB4 ¹⁾	70...185 mm ² OZXB4 ¹⁾	- - - - -	- - -
Tightening torque	8 Nm	16 Nm	22 Nm			
Cu cable - Stranded Clamp type	1 x mm ² Included	10...95 mm ² 150 6 14 Nm	6...150 mm ² 150 6 14 Nm	16...300 mm ² 150 6 14 Nm	- - - - -	- - -
Tightening torque	8 Nm	25 Nm				
Cu cable - Stranded Clamp type	2 x mm ² Included	6...35 mm ² LZ185 - 2C/120	50...120 mm ² OZXB4 ¹⁾	70...185 mm ² OZXB4 ¹⁾	120...240 mm ² 13922R1	- -
Tightening torque	8 Nm	16 Nm	22 Nm	35 Nm	- -	- -
Cu cable - Stranded Clamp type	3 x mm ² - - - - -	- - - - -	- - - - -	- - - - -	70...185 mm ² 13956R1 45 Nm	- - -
Tightening torque						
Al cable - Stranded Clamp type	1 x mm ² - - - - -	95...185 mm ² 1SDA0549881R1	185...240 mm ² 1SDA055020R1	- - - - -	- - - - -	- - -
Tightening torque		31 Nm	43 Nm			
Al cable - Stranded Clamp type	2 x mm ² - - - - -	- - - - -	- - - - -	120...240 mm ² 1SDA023380R1	- - - - -	- - -
Tightening torque				31 Nm		
Lugs	Width ≤	-	24 mm (0.945 in) 8 mm (0.355 in)	32 mm (1.260 in) 10.2 mm (0.402 in)	47 mm (1.850 in) 10.5 mm (0.413 in)	50 mm (1.969 in) 12.5 mm (0.492 in)
	Diameter ≥	-	18 Nm (160 in lb)	28 Nm (248 in lb)	35 Nm (310 in lb)	45 Nm (398 in lb) 13 mm (0.519 in)
Connection capacity acc to UL / CSA 1 x AWG / kcmil	6...2/0	6...300 kcmil	4...400 kcmil	-	-	-
	Clamp type	Included	ATK185	ATK300	-	-
	Tightening torque	71 in lb	300 in lb	375 in lb	-	-
Connection capacity acc to UL / CSA 2 x AWG / kcmil	-	-	4...500 kcmil	2/0...500 kcmil	2/0...500 kcmil	-
	Clamp type	-	ATK300/2 ²⁾	ATK580/2	ATK580/2	-
	Tightening torque	-	375 in lb	375 in lb	375 in lb	-
Connection capacity acc to UL / CSA 3 x AWG / kcmil	-	-	-	2/0...500 kcmil	2/0...500 kcmil	-
	Clamp type	-	-	ATK750/3	ATK750/3	-
	Tightening torque	-	-	375 in lb	375 in lb	-
Supply and control circuit						
	Cu cable - Stranded 1 x mm ²			0.75...2.5 mm ² (19...14 AWG)		
	Cu cable - Stranded 2 x mm ²			0.75...1.5 mm ² (19...16 AWG)		
	Tightening torque			0.5 Nm (4.4 in lb)		


¹⁾ Terminal shrouds 1SFN125406R1000 must be used.²⁾ Terminal shrouds 1SFN125406R1000 can be used.

PSTX - The advanced range


Dimensions

Main dimensions mm, inches





PSTX30 ... PSTX105

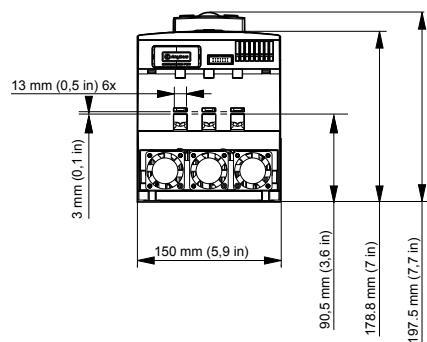


PSTX142 ... PSTX170

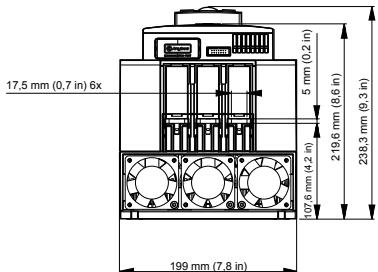

PSTX210 ... PSTX370

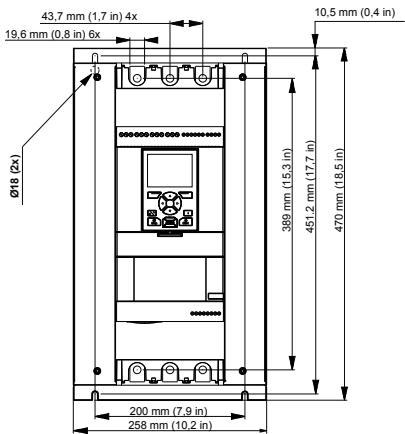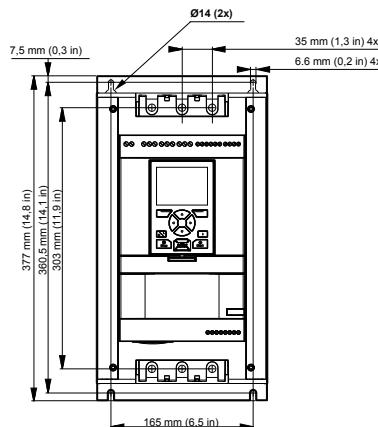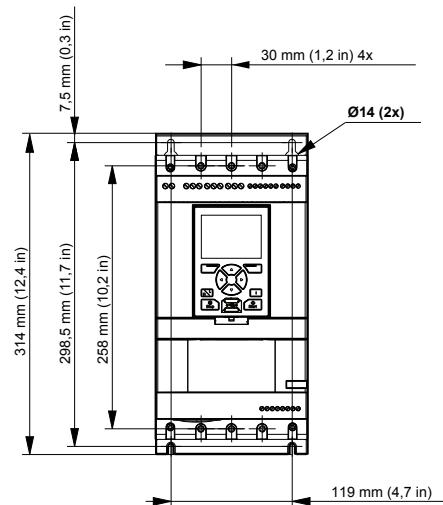

PSTX detachable keypad

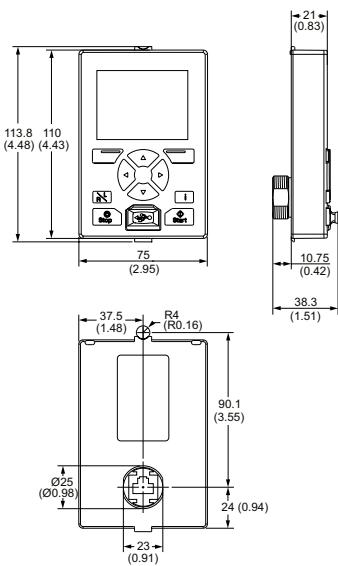


PSTX - The advanced range


Dimensions

Main dimensions mm, inches





PSTX470 ... PSTX570

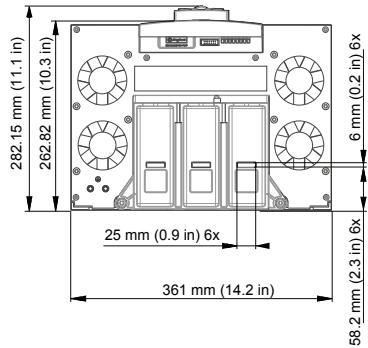



PSTX720 ... PSTX840

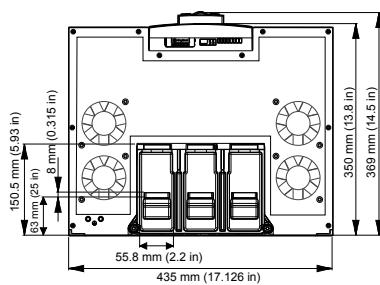

PSTX1050

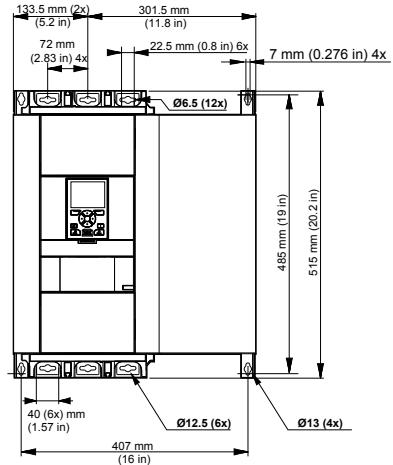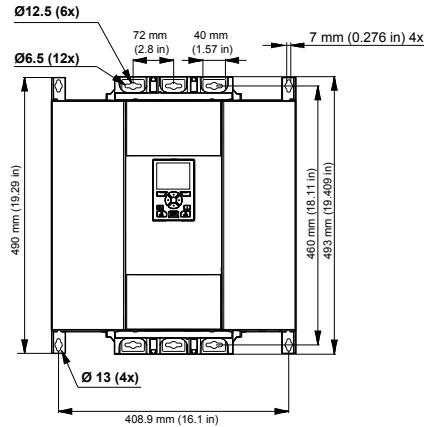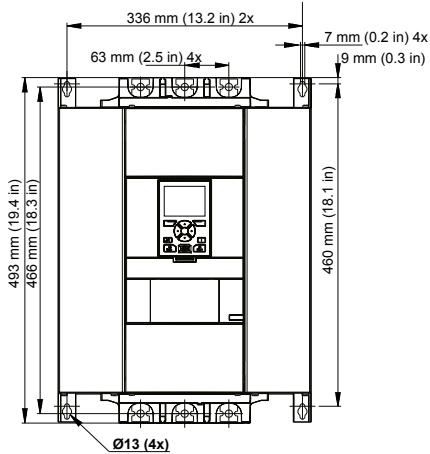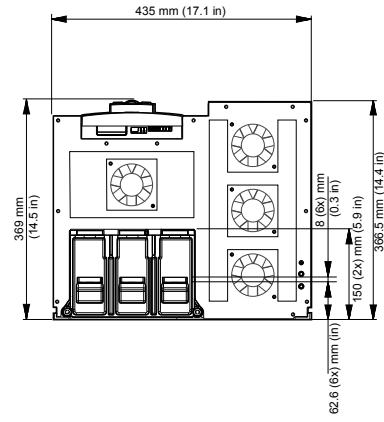

PSTX1250

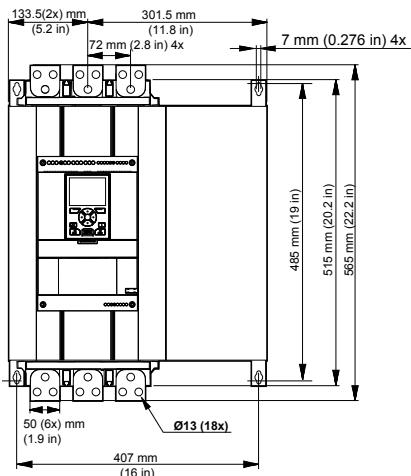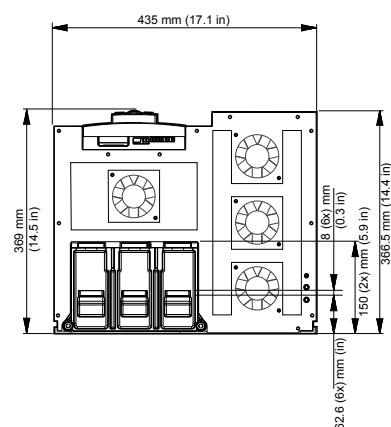


PSTX - The advanced range


Circuit diagrams

PSTX30 ... PSTX1250


IEC circuit diagram

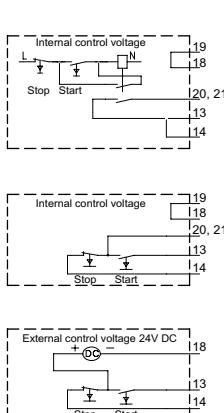


* Only on PSTX470 ... PSTX1250

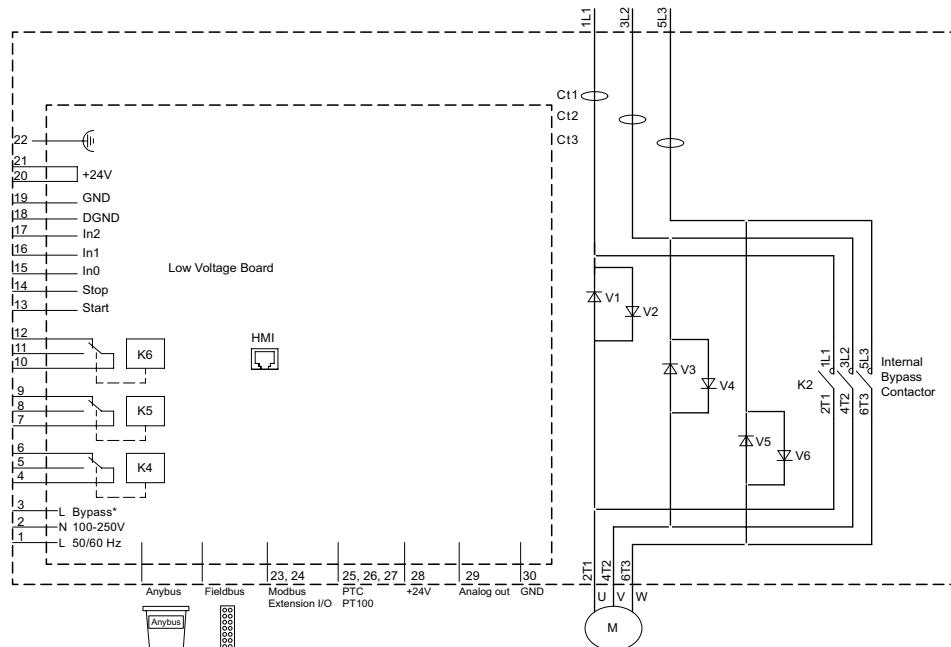

UL circuit diagram

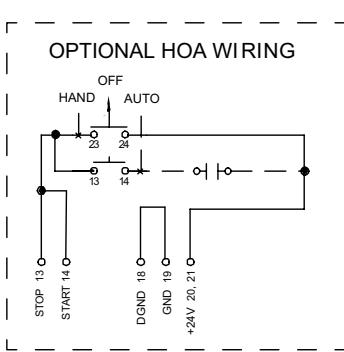

* Only on PSTX470 ... PSTX1250

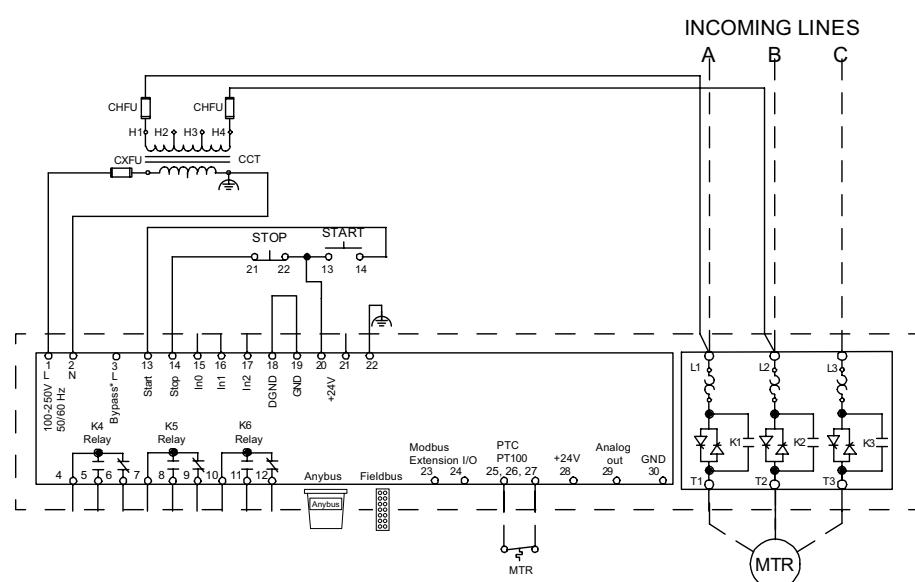

For more circuit diagrams see new.abb.com/low-voltage/products/softstarters

CAUTION



Terminal 22 is a function earth, it is not a protective earth. It shall be connected to the mounting plate.

PSTX - The advanced range

Circuit diagrams

PSTX30 ... PSTX1250


In-line connected with line contactor and fuses

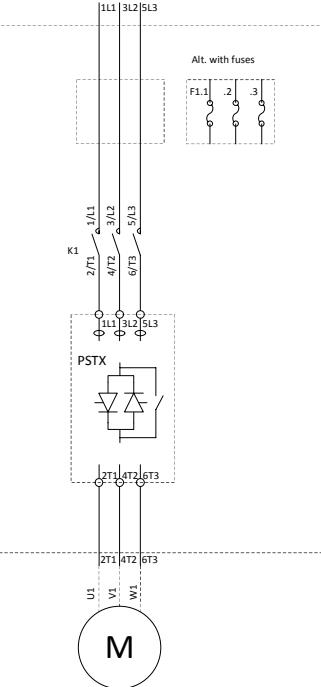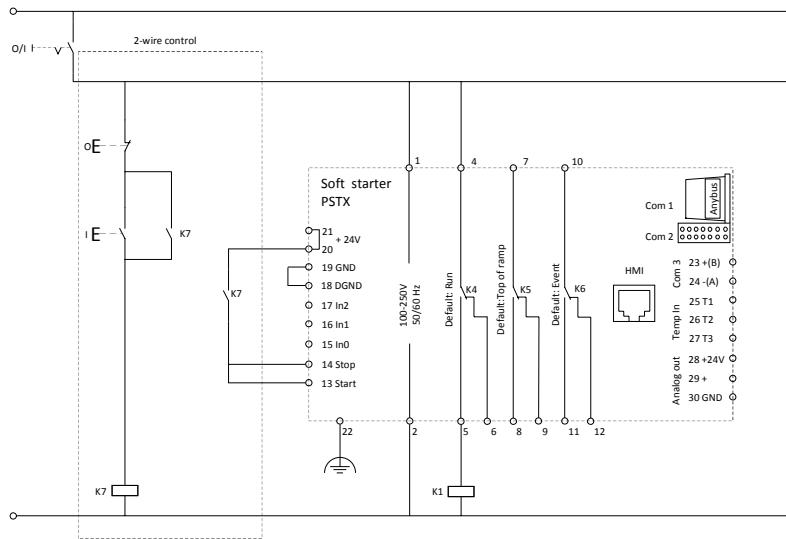



Coil consumption for main contactors.

Pull-in max 15A
Holding max 1.5A

If the pull-in or holding values are higher, the main contactors must be controlled via an auxiliary contactor.




Inside-delta connected with contactor and fuses

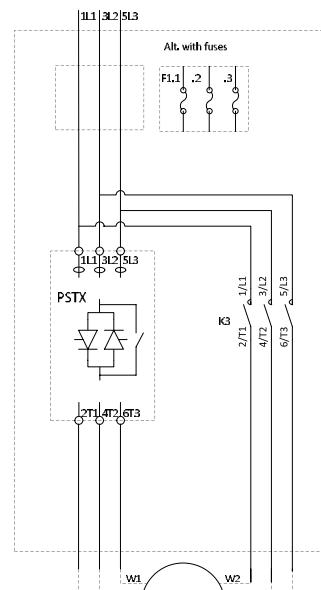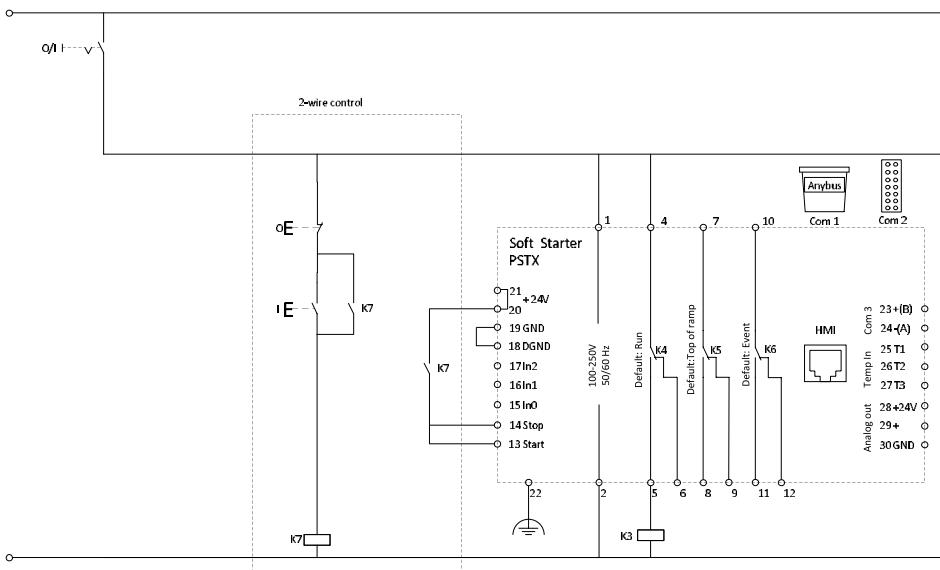

Coil consumption for Inside Delta contactor.

Pull-in max 15A
Holding max 1,5A

If the pull-in or holding values are Higher, the Inside Delta contactor must be controlled via an auxiliary contactor.






Fieldbus communication

60	Introduction
61	Anybus ordering details
63–63	Fieldbusplug ordering details
64–65	Fieldbusplug accessories ordering details

Fieldbus communication

Introduction

PSR, PSE and PSTX softstarters can be connected to a fieldbus network for monitoring and control. All major industrial fieldbus protocols are covered with different accessories making the installation very flexible.

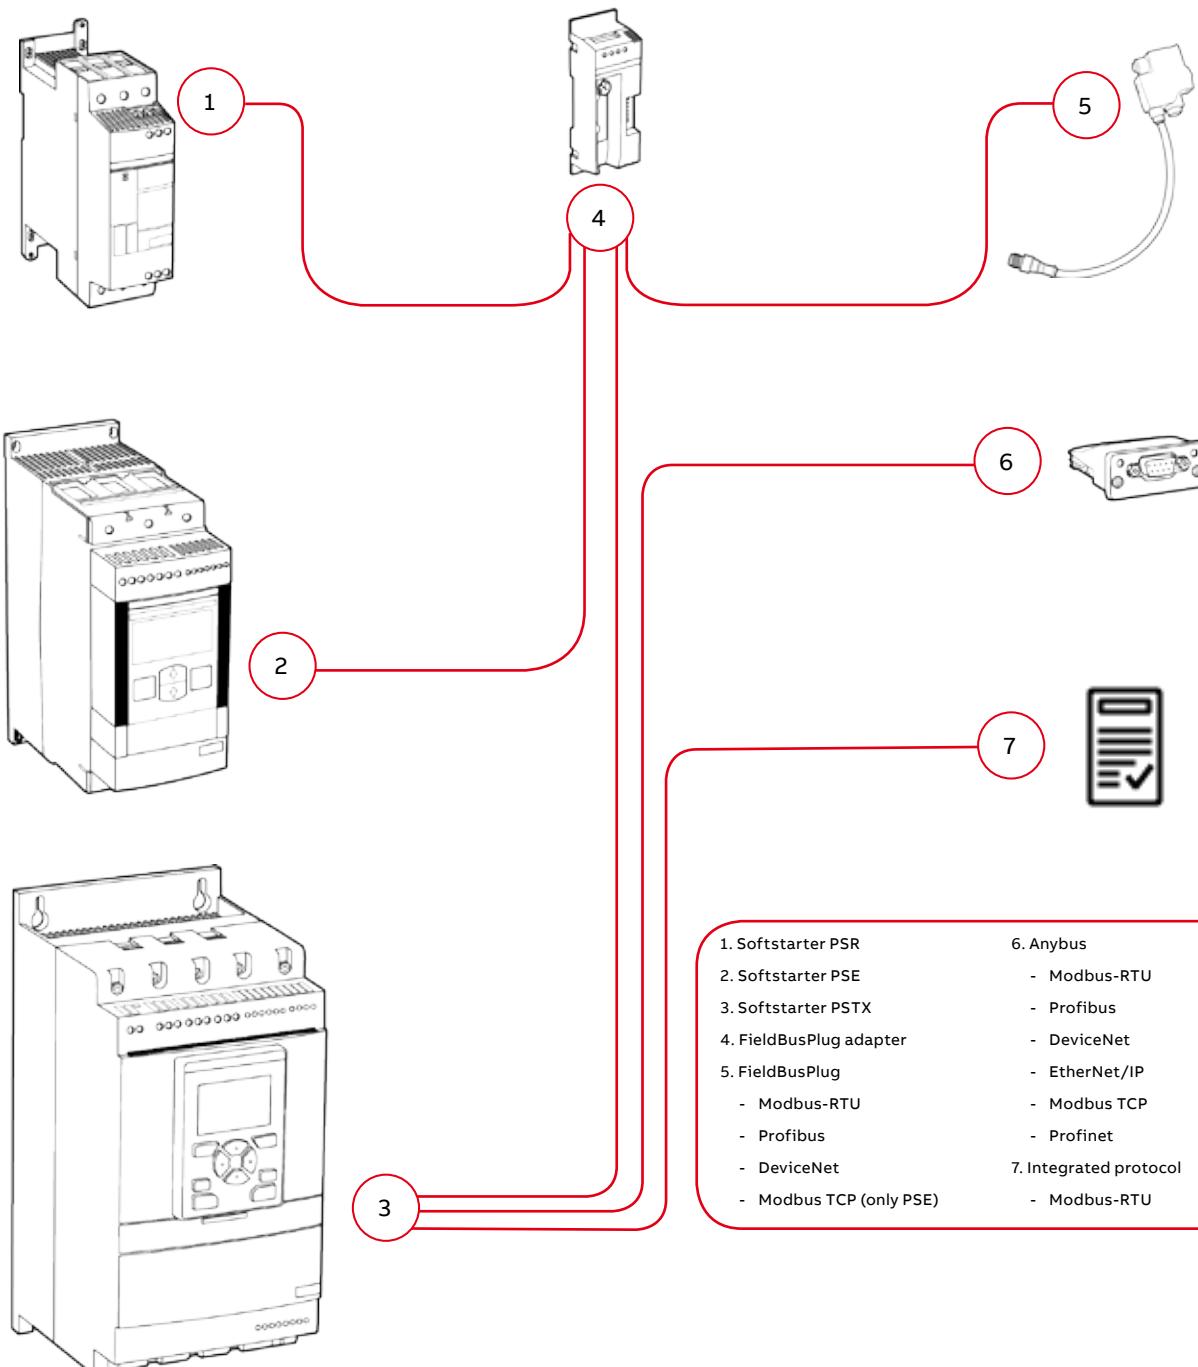

Fieldbus communication

Anybus ordering details

	For communication protocol	Type	Order code	Pkg qty	Weight (1 pce) kg	Weight (1 pce) lb
 1SFC132120V0001	Profibus Modbus-RTU	AB-PROFIBUS-1 AB-MODBUS-RTU-1	1SFA899300R1001 1SFA899300R1003	1 1	0.042 0.042	(0.093) (0.093)
 1SFC132118V0001	EtherNet/IP (1-port) Modbus TCP (1-port)	AB-ETHERNET-IP-1 AB-MODBUS-TCP-1	1SFA899300R1005 1SFA899300R1007	1 1	0.042 0.042	(0.093) (0.093)
 1SFC132121V0001	DeviceNet	AB-DEVICENET-1	1SFA899300R1002	1	0.042	(0.093)
 1SFC132119V0001	EtherNet/IP (2-port) Modbus TCP (2-port) Profinet (2-port)	AB-ETHERNET-IP-2 AB-MODBUS-TCP-2 AB-PROFINET-IO-2	1SFA899300R1006 1SFA899300R1008 1SFA899300R1010	1 1 1	0.042 0.042 0.042	(0.093) (0.093) (0.093)

Fieldbus communication

Fieldbusplug ordering details

Black cable



DNP21-FBP
MRP21-FBP
COP21-FBP

DeviceNet FieldBusPlug

- Ready-made DeviceNet fieldbus interface with various cable lengths
- Applicable on all FBP motor starters and other devices
- Degree of protection IP65, diagnostic LED

Designation	Cable length	Type	Order code	Pkg qty	Weight (1 pce)
				kg	(lb)
DeviceNet-FBP	0.25 m	DNP21-FBP.025	1SAJ230000R1003	1	0.09 (0.20)
DeviceNet-FBP	0.50 m	DNP21-FBP.050	1SAJ230000R1005	1	0.10 (0.22)
DeviceNet-FBP	1.00 m	DNP21-FBP.100	1SAJ230000R1010	1	0.13 (0.29)
DeviceNet-FBP	5.00 m	DNP21-FBP.500	1SAJ230000R1050	1	0.36 (0.79)



DNP21-FBP
MRP21-FBP
COP21-FBP

Modbus-RTU FieldBusPlug

- Ready-made Modbus-RTU fieldbus interface with various cable lengths
- Applicable on all FBP motor starters and other devices
- Degree of protection IP65, diagnostic LED

Designation	Cable length	Type	Order code	Pkg qty	Weight (1 pce)
				kg	(lb)
MODBUS-RTU-FBP	0.25 m	MRP21-FBP.025	1SAJ250000R0003	1	0.09 (0.20)
MODBUS-RTU-FBP	0.50 m	MRP21-FBP.050	1SAJ250000R0005	1	0.10 (0.22)
MODBUS-RTU-FBP	1.00 m	MRP21-FBP.100	1SAJ250000R0010	1	0.13 (0.29)
MODBUS-RTU-FBP	5.00 m	MRP21-FBP.500	1SAJ250000R0050	1	0.36 (0.79)



MTQ22-FBP

Ethernet Modbus TCP interface MTQ22-FBP

- Ethernet connectivity for up to four units
- Modbus TCP protocol
- Supports all network topologies
- No special Ethernet connectors required in MCCs
- Easy to use in withdrawable applications

Designation	Cable length	Type	Order code	Pkg qty	Weight (1 pce)
				kg	(lb)
Ethernet Modbus TCP interface		MTQ22-FBP	1SAJ260000R0100	1	0.20 (0.44)
Cable MTQ to FieldBusPlug adapter	1.5 m	CDP17-FBP.150	1SAJ929170R0015	1	0.01 (0.02)
Passive cable fixing bracket		CDP11-FBP.4	1SAJ929100R0004	4	0.01 (0.02)

To connect the softstarter to a DeviceNet fieldbus system... you need specific software for PLC setup, (EDS file) which is available at new.abb.com/low-voltage/products/softstarters
If you need help or advice, please contact your local ABB office.

Fieldbus communication

Fieldbusplug ordering details

Purple cable

Profibus DP FieldBusPlug



- Ready-made Profibus DP fieldbus interface with various cable lengths.
- Supports PROFIBUS DP V0 and V1
- Applicable on all FBP motor starters and other devices
- Degree of protection IP65, diagnostic LED

Designation	Cable length	Type	Order code	Pkg qty	Weight (1 pce) kg	(lb)
Profibus DP FBP	0.25 m	PDP22-FBP.025	1SAJ240100R1003	1	0.09	(0.20)
Profibus DP FBP	0.50 m	PDP22-FBP.050	1SAJ240100R1005	1	0.10	(0.22)
Profibus DP FBP	1.00 m	PDP22-FBP.100	1SAJ240100R1010	1	0.13	(0.29)
Profibus DP FBP	2.00 m	PDP22-FBP.200	1SAJ240100R1020	1	0.20	(0.44)
Profibus DP FBP	5.00 m	PDP22-FBP.500	1SAJ240100R1050	1	0.36	(0.79)

Profibus DP FieldBusPlug for four devices

- PDQ22 is a member of the ABB's FieldBusPlug family of bus connectors. It allows the connection of up to four devices to Profibus DP by just using one Profibus node access. This allows a cost efficient device integration for devices that are located physically nearby. PDQ22 supports DP-V0 and DP-V1. The degree of protection is IP66. There are separate diagnosis LEDs for bus and device status.

Note that the accessory PDQ22-FBP only works with the PSR and PSE softstarter.



Designation	Type	Order code	Pkg qty	Weight (1 pce) kg	(lb)
Quadruple bus connector	PDQ22-FBP	1SAJ240200R0050	1	0.20	(0.44)
DINrail adapter for PDQ22-FBP	CDA11-FBP.0	1SAJ929300R0001	1	0.11	(0.24)
Fixing bracket for passive plug of connection cable	CDP11-FBP.0	1SAJ929100R0001	1	0.50	(1.10)

To connect the softstarter to a DeviceNet fieldbus system... you need specific software for PLC setup, (EDS file) which is available at new.abb.com/low-voltage/products/softstarters
If you need help or advice, please contact your local ABB office.

Fieldbus communication

Fieldbusplug accessories ordering details
Black cable

Accessories for the DeviceNet and Modbus-RTU bus connector



DNF11-FBP.050

DeviceNet and Modbus-RTU round cable for bus junctions

Ready-made bus cable with an M12 connector and an open cable end

Designation	Cable length	Type	Order code	Pkg qty	Weight (1 pce) kg	(lb)
Round cable with female connector	0.50 m	DNF11-FBP.050	1SAJ923002R0005	1	0.04	(0.09)
Round cable with male connector	0.50 m	DNM11-FBP.050	1SAJ923003R0005	1	0.04	(0.09)

DNM11-FBP.050

DeviceNet and Modbus-RTU round cable for bus extension



DNX11-FDP

Ready-made bus cable with M12 male and female connectors

Designation	Cable length	Type	Order code	Pkg qty	Weight (1 pce) kg	(lb)
Extension cable	1.00 m	DNX11-FBP.100	1SAJ923001R0010	1	0.08	(0.18)
Extension cable	3.00 m	DNX11-FBP.300	1SAJ923001R0030	1	0.20	(0.44)
Extension cable	5.00 m	DNX11-FBP.500	1SAJ923001R0050	1	0.31	(0.68)
Round cable	100.00 m	DNC11-FBP.999	1SAJ923004R0001	1	5.60	(12.35)



DNM11-FBP.0

DNF11-FBP.0

DeviceNet and Modbus-RTU round cable connectors

Bus cable and coupling accessories

Designation	Type	Order code	Pkg qty	Weight (1 pce) kg	(lb)
Male connector for round cable	DNM11-FBP.0	1SAJ923005R0001	5	0.15	(0.33)
Female connector for round cable	DNF11-FBP.0	1SAJ923006R0001	5	0.15	(0.33)

DNF11-FBP.0



DNR11-FBP.120

DeviceNet and Modbus-RTU termination resistor

Designation	Type	Order code	Pkg qty	Weight (1 pce) kg	(lb)
Termination Resistor, 120 Ohm	DNR11-FBP.120	1SAJ923007R0001	1	0.02	(0.04)

Fieldbus communication

Fieldbusplug accessories ordering details

Purple cable

Accessories for the Profibus DP Bus Connector					
Profibus DP round cable for bus junctions					
Ready-made bus cable with an M12 connector and an open cable end.					
Application on bus junctions such as e.g. Profibus DB couplers or devices with an integrated Profibus DB interface					
Designation	Cable length	Type	Order code	Pkg qty (1 pce)	Weight kg (lb)
PDF11-FBP.50	0.50 m	PDF11-FBP.050	1SAJ924002R0005	1	0.04 (0.09)
PDM11-FBP.50	0.50 m	PDM11-FBP.050	1SAJ924003R0005	1	0.04 (0.09)
Profibus DP round cable for bus extension					
Ready-made bus cable with M12 male and female connectors					
Round cable on coil					
Designation	Cable length	Type	Order code	Pkg qty (1 pce)	Weight kg (lb)
PDX11-FBP	0.50 m	PDX11-FBP.050	1SAJ924001R0005	1	0.04 (0.09)
	1.00 m	PDX11-FBP.100	1SAJ924001R0010	1	0.08 (0.18)
	3.00 m	PDX11-FBP.300	1SAJ924001R0030	1	0.20 (0.44)
	5.00 m	PDX11-FBP.500	1SAJ924001R0050	1	0.31 (0.68)
	100.00 m	PDC11-FBP.999	1SAJ924004R1000	1	5.60 (12.35)
Profibus DP accessories for bus extension					
Designation	Type	Order code	Pkg qty (1 pce)	Weight kg (lb)	
PDM11-FBP	Male Connector for round cable	PDM11-FBP.0	1SAJ924005R0001	5	0.03 (0.07)
PDF11-FBP	Female Connector for round cable	PDF11-FBP.0	1SAJ924006R0001	5	0.03 (0.07)
Profibus DP termination resistor, miscellaneous accessories					
Designation	Type	Order code	Pkg qty (1 pce)	Weight kg (lb)	
PDR11-FBP.150	Termination resistor, 150 Ohm	PDR11-FBP.150	1SAJ924007R0001	1	0.03 (0.07)
	Feeding connector 24V DC, Code B-A	PDV11-FBP.0	1SAJ924008R0001	1	0.04 (0.09)
	Feeding connector 24V DC, Code A-A	PDV12-FBP.0	1SAJ924011R0001	1	0.04 (0.09)
PDV11-FBP, PDV12-FBP	Adaptor M12-Dsub9-M12 Cable length 0.50m	PDA11-FBP.050	1SAJ924009R0001	1	0.04 (0.09)
	Adaptor M12-Dsub9-M12 Cable length 2 x 0.50m	PDA12-FBP.050	1SAJ924010R0001	1	0.04 (0.09)
Extension cable					
Designation	Cable length	Type	Order code	Pkg qty (1 pce)	Weight kg (lb)
PDA11-FBP.050	0.3 m	CDP15-FBP.030	1SAJ929140R0003	1	0.01 (0.02)
	0.6 m	CDP15-FBP.060	1SAJ929140R0006	1	0.01 (0.02)
	1.5 m	CDP15-FBP.150	1SAJ929140R0015	1	0.20 (0.44)
PDA12-FBP.050	1.5 m	CDP16-FBP.150	1SAJ929150R0015	1	0.20 (0.44)

Marketing materials and tools

It is easy to access more information about ABB's softstarters online. On our web page you will find tools for selection, coordination tables, CAD drawings and different types of documentation.



Online softstarter selection tool
Fast and easy selection of softstarter on any device.




www.abbcontrol.fr/softstarter

Coordination tables

Online tool for coordination with short circuit protection, overload protection and line contactor.





applications.it.abb.com/SOC

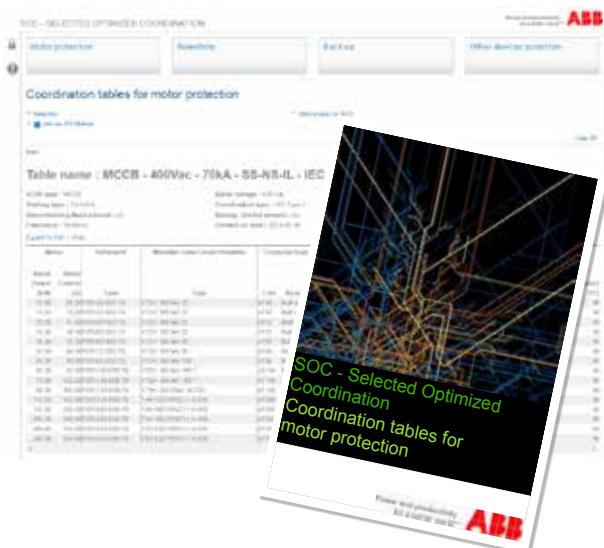

Download 2D and 3D drawings in any format
Use our Cadenas portal to download CAD drawings to all our softstarters.



Cadenas portal for
CAD drawings

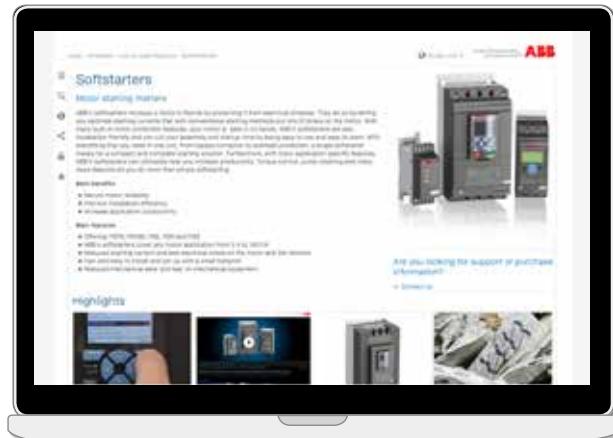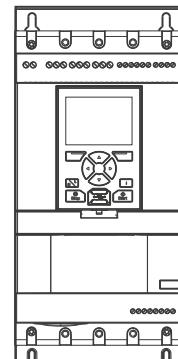

More information online

- Product catalogs and brochures
- Certificates and approvals
- Case studies
- Product simulator
- Circuit diagrams and application diagrams
- Manuals
- EDS- and GSD-files for fieldbus connection
- Softstarter selection tool



new.abb.com/low-voltage/products/softstarters



<http://new.abb.com/low-voltage/launches/pstx>

SoftstarterCare™ – Service Engineer Tool

Software for easy set-up of PSE and PSTX,
using a PC.



new.abb.com/low-voltage/products/softstarters

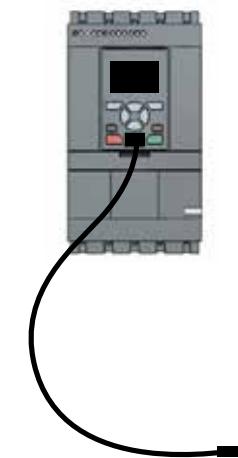


ABB AB

Control Products

Low Voltage Products

SE-721 61 VÄSTERÅS, Sweden

www.abb.com/lowvoltage

www.abb.com/connecttocontrol



To get more information,
install QR code reader on
your mobile device, scan the
code and see more.